

Oil Pressure/Water Pressure Connection Block ▶ Fixed Spacing Type

I Type . End-to-End Through Hole



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

② Side Length: 30x35

Model(①Code)

PCIAQ

③ Number Side Holes

2K

④ Q

Q2

⑤ G.K

G3-K2



Price Excluding Tax (Yen)

Discounted Price

Quantity 1~9 10~


Price 100% Separate Quotation




CAD 2D 3D

Code	Type	Side Length	Material		Surface Treatment	Normal Pressure
			International	Equivalent		
PCIAQ	I-shaped End-to-End Through Hole Fixed Spacing Type	30×35	Q235	SS400	Zinc Plated	20.6MPa(≈210kgf/cm ²) Below
PCIAR			OCr18Ni12Mo2	SUS316	Electroless Nickel Plating	
PCIAS			Brass		—	1MPa(≈10.2kgf/cm ²) Below
PCIAE		50×50	Q235	SS400	Zinc Plated	20.6MPa(≈210kgf/cm ²) Below

Side Length: 30x35

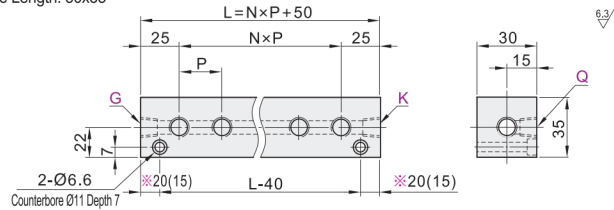

Side Length: 50x50

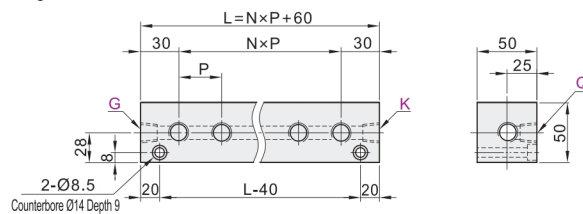

Side Length: 30x35

Model		Rc(PT)/NPT Selection		Spacing P	N	Number of Threads
Code	Number Side Holes	Q	G·K			
PCIAQ PCIAR PCIAS PCIAE	1K			40	0	3
	2K	1 (1/8)	2 (1/4)		1	4
	3K	2 (1/4)	3 (3/8)		2	5
	4K	3 (3/8)	4 (1/2)		3	6
	5K	1N(NPT1/8)	2N(NPT1/4)		4	7
	6K	2N(NPT1/4)	3N(NPT3/8)		5	8

① When the number of side holes is "6K", an additional mounting hole suitable for M6 screws is added at the L/2 position.

※ When the number of side holes is 1K, the dimensions are within the parentheses.

Side Length: 50x50

Model		Rc(PT) Selection		Spacing P	N	Number of Threads
Code	Number Side Holes	Q	G·K			
PCIAE	1K			60	0	3
	2K	2 (1/4)			1	4
	3K	3 (3/8)			2	5
	4K	4 (1/2)			3	6
	5K	6 (3/4)			4	7
	6K				5	8

① When the number of side holes is "6K", an additional mounting hole suitable for M6 screws is added at the L/2 position.

※ When the number of side holes is 1K, the dimensions are within the parentheses.