

Precision shim ▶ Dimension selection type / Specified dimension type

Square shape



Please order according to the diagram


①~④ Select the type and parameters in the order of for ordering

Model(①Code) - ②T - ③A - ④B
FZWGA - **T0.2** - **A250** - **B50**




Discounted Price
 Quantity 1~9 10~
 Price 100% Separate Quotation
 Price Excluding Tax (Yuan)

Dimension selection type



CAD 2D 3D

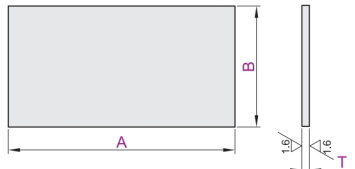

Code	Type	Sales method	Material	Hardness
FZWGA	Dimension selection type	Single	SK Material	55~62HRC
FZWGB			SUS304H	370~430HV

☑ Tolerance chart

Code	Tolerance					
	0.05	0.1	0.2	0.3	0.5	1.0
FZWGA	—	±0.009	±0.010	±0.018	±0.020	±0.030
FZWGB	±0.002	±0.010	±0.012	±0.020	±0.025	±0.030

☑ A/B Tolerance chart

A.B	A/B Tolerance
20~	+0.5
400~	—
800~	±1.2

Model		A	B
Code	T		
FZWGA (SK Material)	0.1	100	50
	0.2	250	
	0.3	500	
	0.5	500	
	1.0	1000	

Model		A												B		
Code	T	10	20	30	40	50	60	70	80	90	100	120	150	10	20	30
FZWGB (SUS304H)	0.05															
	0.1				40	50	60	70	80	90	100	120		40	50	
	0.2						60	70	80	90	100	120	200	60	70	
	0.3							80	90	100	120	150	200	80	90	
	0.5									100	120	150	200	100	120	
	1.0											150	200	150		
												200	200			
													1000	300		



Please order according to the diagram


①~④ Select the type and parameters in the order of for ordering

Model(①Code) - ②A - ③B - ④T
FZXHA - **A250** - **B50** - **T0.2**




Discounted Price
 Quantity 1~9 10~
 Price 100% Separate Quotation
 Price Excluding Tax (Yuan)

Specified dimension type



CAD 2D 3D

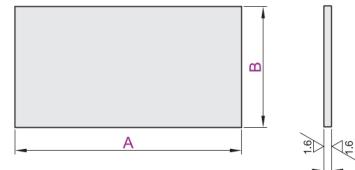

Code	Type	Sales method	Material	Hardness
FZXHA	Specified dimension type	Single	SK Material	55~62HRC
FZXHB			SUS304H	370~430HV

☑ Tolerance chart

Code	Tolerance					
	0.05	0.1	0.2	0.3	0.5	1.0
FZXHA	—	±0.009	±0.010	±0.018	±0.020	±0.030
FZXHB	±0.002	±0.010	±0.012	±0.020	±0.025	±0.030

☑ A/B Tolerance chart

A.B	A/B Tolerance
20~	±0.5
400~	±0.8
800~	±1.2

Model	Minimum Unit 1		T
	A	B	
FZXHA (SK材)	10~1000	10~150	0.1 0.2 0.3 0.5 1.0

Model	Minimum Unit 1		T
	A	B	
FZXHB (SUS304H)	5~100	5~100	0.1 0.2 0.3 0.5 1.0
	101~200	20~200	
	201~1000	20~300	
	1001~1200	301~400	

① A≥B

① A≥B