

θ-Axis·Ball Screw Drive

Ball Bearing Guide



Model(1 Code) — (2) Specification — (3) Voltage Selection — (4) Cable Selection

Model(**1**Code)

2 Spe

3 Voltage Selection

Cable Selection

RCDHF

40

A

4



Discontinued Price


Quantity	1~9	10~
----------	-----	-----

Price	100%	Separate Quotation
-------	------	--------------------


Price Excluding Tax (Yuan)




Specification :40

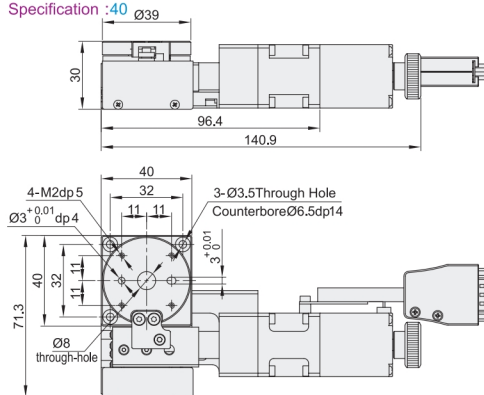


Specification :60

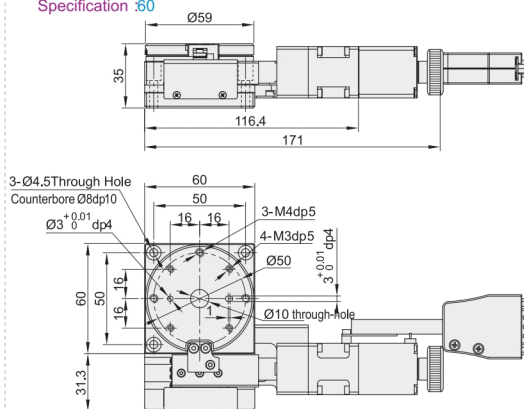

Specification :80

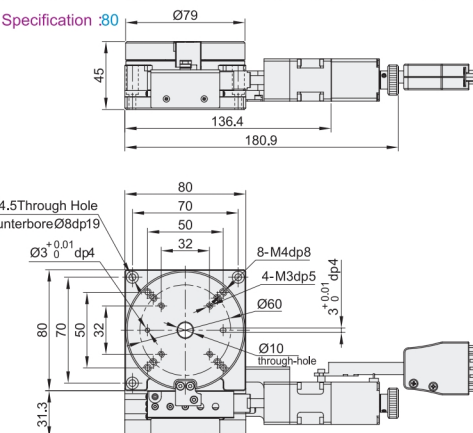

Specification 120

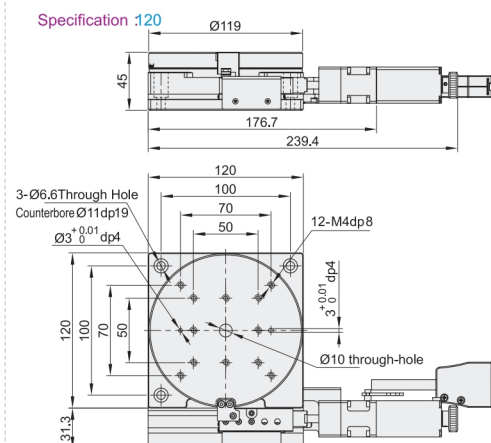

⚠ Sensors: Limit + Home, NPN open-circuit output. ⚠ Grounding wire is required to avoid static interference.

⚠ The displacement stage operates with low-voltage signals. When routed alongside high-voltage cables, there may be signal interference. It is imperative to implement shielding measures.

Conversion Ratio Example

Table Center 