

Heavy Duty Swivel Lifting Eye ▶ Pull Ring Type



Please order according to the diagram

①~② Select the-Type and parameters in the order of for ordering

Model(①Code) - ②Specification

USA00

0.5T




Price Excluding Tax (Yuan)

Discounted Price			
Quantity	1~9	10~	
Price	100%	Separate Quotation	



CAD 2D 3D

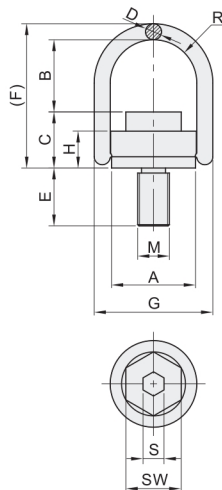

Code	Type	Material	Surface Treatment
USA00	Heavy Duty Swivel Lifting Eye Pull Ring Type	Alloy Steel	Baking Finish

① Due to the baking process, some areas of the product's lifting point may remain unpainted.

Model		Safety Factor	Relative Tightening Torque (Newton-meters)	M	A	B	C	D	E	F	G	H	R	S	SW	Net weight (kg)
Code	Specification															
USA00	0.5T	4	30	8		42	28		12					6	13	0.3
	0.7T		60	10	33	41	29	11	15	80	58	23	17		17	
	1.0T		100	12		40	31		18					8	19	
	1.5T		120	14	51	56	45	17	21	117	90	36	27	10	22	0.9
	2.0T		150	16		54	46		24						24	
	2.5T		200	18	65	78	57	20	27	153	108	44	34	12	30	
	3.0T		250	20	51	52	49	17	30	117	90	36	27		30	1
	5.0T		400	24	72	81	59	22	36	162	125	44	37	14	36	2.6

Working Limit Load

Rings Installation Method																					
Number of rings		1	2	1	2	2	2	2	2	2	2	3~4	3~4	3~4	3~4	3~4	3~4	3~4	3~4	3~4	3~4
Lifting Angle		0°	0°	90°	90°	0~45°	45~60°	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical	0~45°	45~60°	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical
Model		Working Limit Load (Tons)																			
Code	Specification	Threaded																			
USA00	0.5T	M8	0.8	1.6	0.5	1	0.7	0.5	0.5	1.1	0.8	0.5									
	0.7T	M10	1.2	2.4	0.7	1.4	1	0.7	0.7	1.5	1.1	0.7									
	1.0T	M12	2	4	1	2	1.4	1	1	2.1	1.5	1									
	1.5T	M14	2.4	4.8	1.5	3	2.1	1.5	1.5	3.2	2.3	1.5									
	2.0T	M16	3.2	6.4	2	4	2.8	2	2	4.2	3	2									
	2.5T	M18	5	10	2.5	5	3.5	2.5	2.5	5.3	3.8	2.5									
	3.0T	M20	5.6	11.2	3	6	4.2	3	3	6.3	4.5	3									
	5.0T	M24	9.2	18.4	5	10	7	5	5	10.5	7.5	5									