

Bow Shackle ▶ W-type / X-type



Please order according to the diagram

①~② Select the-Type and parameters in the order of for ordering

❑ W type

Model(①Code) — ②Specification

UTANO

0.75T



Discounted Price

Quantity 1~9 10~

Price 100% Separate Quotation

Price Excluding Tax (¥/kg)




CAD 20 20

Code	Type	Material	Surface Treatment
UTANO	Bow Shackle	Carbon Steel	Hot-Dip
UTANP		Alloy steel	Galvanized
UTAOP			Treatment


❑ Features:

- Forged carbon steel construction with bolts for the bow shackle.
- 100% magnetic crack detection test during manufacturing to ensure quality.
- Fatigue limit test of 20,000 cycles with a force of 1.5 times the working load pole.

W type



X type

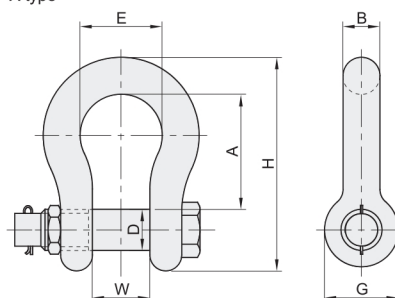

❑ W type

Model	Working Load Limit (Tonnes)	Safety Factor	B	D	W	A	E	G	H	Net weight (Kg)
Code	Specification									
UTANO	0.75T	0.75	8	9.5	12	31	21	19	54	0.1
	1T	1	10	11	16	36	26	23	65	0.1
	1.5T	1.5	11	13	19	43	30	27	75	0.2
	2T	2	13	16	20	47	33	30	85	0.3
	3.25T	3.25	16	19	27	61	43	38	106	0.6
	4.75T	4.75	19	22	33	72	50	46	126	1.1

Model	Working Load Limit (Tonnes)	Safety Factor	B	D	W	A	E	G	H	Net weight (Kg)
Code	Specification									
UTANP	1.2T	1.2	8	9.5	12	31	21	19	54	0.1
	2T	2	10	11	16	36	26	23	65	0.1
	2.7T	2.6	11	13	19	43	30	27	75	0.2
	3.3T	3.4	13	16	20	47	33	30	85	0.3
	5T	5	16	19	27	61	45	39	107	0.6

❑ X type

Model	Working Load Limit (Tonnes)	Safety Factor	B	D	W	A	E	G	H	Net weight (Kg)
Code	Specification									
UTAOP	0.75T	0.75	8	9.5	12	31	21	19	54	0.1
	1T	1	10	11	16	36	26	23	65	0.1
	1.5T	1.5	11	13	19	43	30	27	75	0.2
	2T	2	13	16	20	47	33	30	85	0.4
	3.25T	3.25	16	19	27	61	43	38	106	0.7
	4.75T	4.75	19	22	33	72	50	46	126	1.0