

Shaft Retaining Ring ▶ C-Type Reverse Shaft Retaining Ring



Please order according to the diagram

①~② Select the-Type and parameters in the order of for ordering

Model(①Code) - ②Specification

URHEO

6




Discounted Price			
Quantity	1~9	10~	
Price	100%	Separate Quotation	


Price Excluding Tax (¥/unit)



Retaining Ring Dimensions

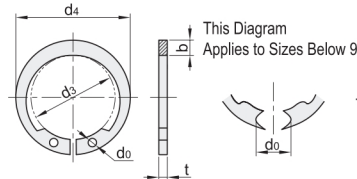

Retaining Ring Assembly Dimensions

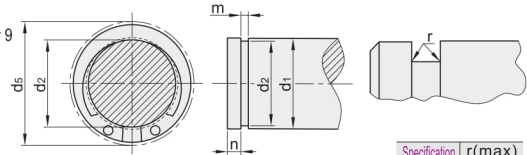

Specification	r(max)
26 or more	0.13
Less than 26	0.25

Model		Retaining Ring Dimensions								For shafts						
Code	Specification	d3		d4	t		b	d0	Tolerance	d5	d1	d2		m		n
		Basic Dimension	Limit Deviation		Basic Dimension	Limit Deviation						Basic Dimension	Limit Deviation	Basic Dimension	Limit Deviation	
URHEO	6	5.6		8	0.5	±0.03	1.2	2.2	±0.2	8.9	6	5.7	-0.04	0.6	±0.1	
	7	6.5	+0.1 -0.2	9.3	0.6		1.4	2.6		10.3	7	6.7		0.7		
	8	7.4		10.6	0.7	±0.04	1.6	3		11.7	8	7.6	0 -0.06	0.8		
	9	8.4		12	0.8		1.8	3.4		13.1	9	8.6		0.95		
	10	9.3	±0.15	13.3			2			14.5	10	9.6	0 -0.09			
	11	10.2		14.4			2.1			16	11	10.5				
	12	11.1		15.5			2.2			17.2	12	11.5				
	13	12		16.6	1	±0.05	2.3	1.2		18.4	13	12.4		1.15		
	14	12.9		17.5						19.4	14	13.4				1.5
	15	13.8	±0.18	18.6			2.4		±0.3	20.6	15	14.3	0 -0.11			
	16	14.7		19.7			2.5			21.8	16	15.2				
	17	15.7		20.9			2.6			23	17	16.2				
	18	16.5		21.9			2.7			24.2	18	17				
	19	17.5		23.1			2.8		±0.4	25.2	19	18				
	20	18.5		24.3			2.9			27	20	19				
	21	19.5		25.5	1.2		3	1.5		28	21	20		1.35		
	22	20.5		26.5						29	22	21				
	24	22.2	±0.2	28.6			3.2			31.5	24	22.9	0 -0.21			
	25	23.2		29.8			3.3			33	25	23.9				1.7
	26	24.2		31		±0.06	3.4			34	26	24.9				
	28	25.9		33.1			3.6		±0.4	36.5	28	26.6				2.1
	30	27.9		35.3			3.7			38.5	30	28.6			±0.14 0	
	32	29.6		37.4	1.5		3.9	1.8		41	32	30.3		1.65		2.6
	34	31.5		39.7			4.1			43.5	34	32.3				
	35	32.2	±0.25	40.6			4.2			45	35	33				
	36	33.2		41.6			4.2			46	36	34				3
	38	35.2		44			4.4			48	38	36				
	40	37		46.2	1.75		4.6	2		51	40	38	0 -0.25	1.9		
	42	38.5		48.1			4.8			54	42	39.5				
	45	41.5		51.3			4.9			57	45	42.5				3.8
	48	44.5	±0.4	55.1			5.3			61	48	45.5				
	50	45.8		56.8		±0.07	5.5		±0.5	63	50	47				
	52	47.8		59			5.6			65	52	49				
	55	50.8		62.6			5.9			69	55	52				
	58	53.8		66	2		6.1	2.5		72	58	55		2.2		
	60	55.8		68.4			6.3			75	60	57				4.5
	62	57.8	±0.45	70.8			6.5			77	62	59				
	63	58.8		72			6.6			78	63	60	0 -0.3			
	65	60.8		74.4			6.8		±0.7	81	65	62		2.7		
	68	63.5		77.5			7			84	68	65				
	70	65.5		79.9	2.5	±0.08	7.2	3		87	70	67				
	75	70.5		85.7			7.6			92	75	72				
	80	74.5		90.5			8			98	80	76.5				5.3