

Positioning Pin ▶ Shouldered Type · Internal Thread Type · P-sized Selection Models / P.L.B Dimension Specified Models

Large/Small Head Taper Angle Type



Please order according to the diagram

①~⑤ Select the type and parameters in the order of for ordering

① P-sized Selection Models

Model(①Code) - ②D - ③P
BDPEQ - D6 - P6

① P.L.B Dimension Specified Models

Model(①Code) - ②D - ③P - ④L - ⑤B
BDPGQ - D6 - P6 - L10 - B10



Discounted Price






Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yen)



CAD 3D

Code	Type	Tolerance level	Material	Hardness	Surface Treatment
			International Equivalent		
BDPEQ	P-sized Selection Models	Circular	9CrWMn SKS3	Quenching Hardness 58~61HRC	—
BDPER			—	Quenching Hardness 58~61HRC, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
BDPES			0Cr18Ni9 SUS304	—	—
BDPET			GCr15 SUJ2	Quenching Hardness HRC56~, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
BDPFQ			—	Quenching Hardness 58~61HRC	—
BDPFR	Multi-faceted Type	Dg6	9CrWMn SKS3	Quenching Hardness 58~61HRC, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
BDPFS			—	Quenching Hardness 58~61HRC, Coating Hardness 850HV~	—
BDPFT			0Cr18Ni9 SUS304	—	—
BDPGQ			GCr15 SUJ2	Quenching Hardness HRC56~, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
BDPGR			—	Quenching Hardness 58~61HRC	—
BDPGS	P.L.B Dimension Specified Models	Circular	9CrWMn SKS3	Quenching Hardness 58~61HRC, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
BDPGT			—	Quenching Hardness 58~61HRC, Coating Hardness 850HV~	—
BDPHQ			0Cr18Ni9 SUS304	—	—
BDPHR			GCr15 SUJ2	Quenching Hardness HRC56~, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
BDPHS			—	Quenching Hardness 58~61HRC	—
BDPHT	Multi-faceted Type	Dg6	9CrWMn SKS3	Quenching Hardness 58~61HRC, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm
—			0Cr18Ni9 SUS304	—	—
—	—	—	GCr15 SUJ2	Quenching Hardness HRC56~, Coating Hardness 850HV~	Hard Chromium Plating, Coating Thickness 3~5μm

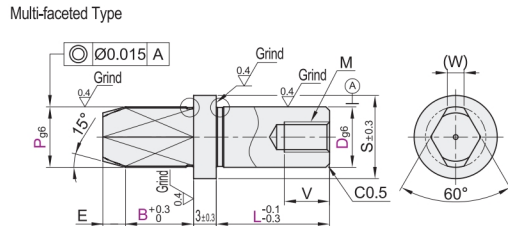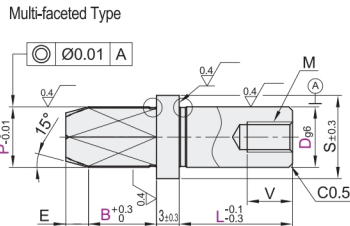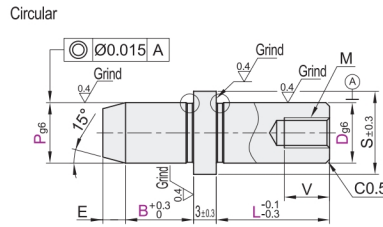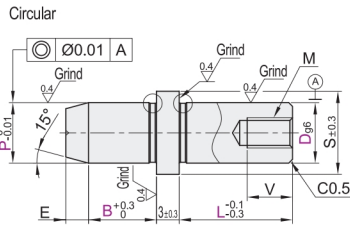

① P Dimension Tolerance Chart

P	g6
3	-0.002 -0.008
3.01~6	-0.004 -0.012
6.01~10	-0.005 -0.014
10.01~18	-0.006 -0.017
18.01~20	-0.007 -0.020

① P-sized Selection Models

Model	Code	D _{g6}	P	L	B	E	S	(W)	V	M
Circular	5	-0.004	3 4 5 6	10	5	2	8	1.5	3	M2
	6	-0.012	4 5 6					1.8	5	M3
	8T		5 6 8		6		11	2.2	6	M4
	8	-0.005		15		3	13	3	8	M5
	10	-0.014	8 10		8		15	3.2		
	12		8 10 12				16	3.5	10	
	13	-0.006	8 10 12 13	22		4	19	4		M8
	16	-0.017	13 14 15 16							
	20	-0.007	16 20	30	10	5	23	5.5	12	
	20	-0.020								

① P.L.B Dimension Specified Models

Model	Code	D _{g6}	Minimum Unit 0.01	Minimum Unit 1	Minimum Unit 0.1	E	S	(W)	V	M
Circular	5	-0.004	3.00~6.00	5~12		2	8	1.5	3	M2
	6	-0.012	4.00~7.00	6(9)~15	2.0~15.0			1.8	5	M3
	8T		5.00~9.00	8(12)~18			11	2.2	6	M4
	8	-0.005		8(12)~18	2.0~30.0				8	M5
	10T	-0.014	7.00~12.00	10(12)~22		3	13	3	6	M4
	10			10(12)~22					8	M5
	12T		7.00~12.00	8(12)~20			15	3.2	6	M4
	12			12~26	3.0~30.0				8	M5
	13T	-0.006	8.00~13.00	10(14)~22			16	3.5	9	M6
	13	-0.017		13(14)~28		4	19	4	10	M8
Multi-faceted Type	16T		13.00~16.00	10(14)~26					9	M6
	16			16~35	5.0~30.0				12	M8
	20T	-0.007	16.00~20.00	12(18)~32		5	23	5.5	9	M6
	20	-0.020		20~42					12	M8

① L Dimension in Parentheses Applies to Multi-faceted Type.