

Bushings for Clamping ▶ L Dimension Specified Type • Standard Type / Thin-walled Type

Shoulderless Type / Shouldered Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

① Standard Type

Model(①Code)

BLKCP

②d

d3

③L

L8

① Thin-walled Type

Model(①Code)

BLKDP

②d

d4

③L

L12



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation


Price Excluding Tax (Yuan)




CAD 2D 3D

Shoulderless Type	Shouldered Type	L Dimension	Tolerance level	Material		Quenching Hardness	Surface Treatment
				International	Equivalent		
Standard Type	Thin-walled Type	Standard Type	Thin-walled Type				
BLKAP	BLKBP	BLKCP	BLKDP	9CrWMn	SKS3	58HRC~	—
BLKAQ	BLKBQ	BLKCP	BLKDP	9Cr18Mo	SUS440C	48~53HRC	Electroless Nickel Plating
BLKAR	BLKBR	BLKCR	BLKDR	9CrWMn	SKS3	58HRC~	—
BLKAS	BLKBS	BLKCS	BLKDS	9Cr18Mo	SUS440C	48~53HRC	Electroless Nickel Plating
BLKAT	BLKBT	BLKCT	BLKDT				
BLKAU	BLKBV	BLKCU	BLKDU				


Shoulderless Type, Standard Type

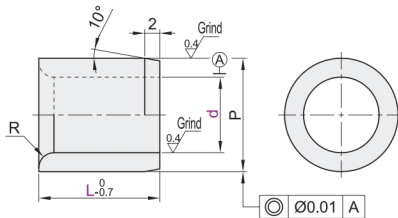


Shoulderless Type, Thin-walled Type

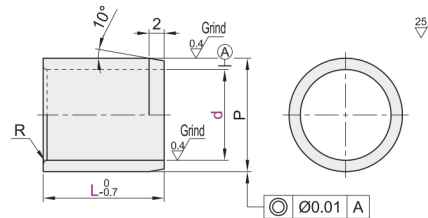

Shouldered Type, Standard Type

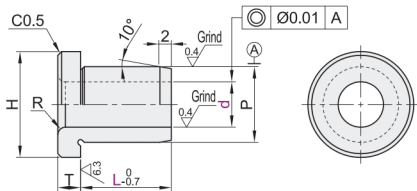

Shouldered Type, Thin-walled Type

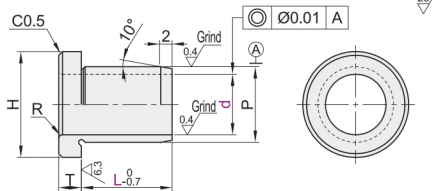

① Standard Type

Model		d Tolerance		L	R	H	T	P	P Tolerance	
Code	d	No Surface Treatment	Electroless Nickel Plating						p6	m6
Shoulderless Type	2	+0.008	+0.010	5 6 8 10 12	0.8	9	2.5	5	+0.020	+0.012
	3	+0.002	0			11		7	+0.012	+0.004
	4					12		8		
	5	+0.012	+0.012	5 6 8 10 12 15 16 20	1.0	14	3	10	+0.024	+0.015
	6	+0.004	0						+0.015	+0.006
	8			5 6 8 10 12 15 16 20 25		16		12		
	10	+0.014	+0.014	6 8 10 12 15 16 20 25		19	4	15	+0.029	+0.018
	12	+0.005	+0.005	8 10 12 15 16 20 25 30	2.0	22		18	+0.018	+0.007
	13			10 12 15 16 20 25 30		26		22		
	15	+0.017	+0.017			30	5	25	+0.035	+0.021
Shouldered Type	16	+0.006	+0.006	10 12 15 16 20 25 30		35		26	+0.022	+0.008
	20				3.0	35	6	30		
	25	+0.020	+0.020	12 15 16 20 25 30 35		40		35	+0.042	+0.025
		+0.007	+0.007						+0.026	+0.009

① Thin-walled Type

Model		d Tolerance		L	R	H	T	P	P Tolerance	
Code	d	No Surface Treatment	Electroless Nickel Plating						p6	m6
Shoulderless Type	3	+0.008	+0.010	6 8 10 12		9	2.5	5	+0.020	+0.012
	4	+0.002	0	6 8 10 12 15 16		10		6	+0.012	+0.004
	5					11	3	7		
	6	+0.012	+0.012	6 8 10 12 15 16 20	0.5	12		8	+0.024	+0.015
	8	+0.004	0			14		10	+0.015	+0.006
	10			6 8 10 12 15 16 20		17	4	13		
	12	+0.014	+0.014	8 10 12 15 16 20		19		15	+0.029	+0.018
	13	+0.005	+0.005	10 12 15 16 20	1.0	21		17	+0.018	+0.007
	15			10 12 15 16 20		24	5	19		
	16	+0.017	+0.017	10 12 15 16 20 25		26		21	+0.035	+0.021
Shouldered Type	20	+0.006	+0.006	10 12 15 16 20 25	2.0	31	6	26	+0.022	+0.008
	25			16 20 25		36		31	+0.042	+0.025
		+0.020	+0.020						+0.026	+0.009
		+0.007	+0.007							