

Hexagonal Post Mounting Bracket Base Mounting Support

Upper End Threaded Type · Side Threaded Type
Standard Type · Guidance Type



Please order according to the diagram

①~② Select the type and parameters in the order for ordering.

■ Hexagonal Post Mounting Bracket

Model(①Code) —

KSACQ

②S

S10

■ Base Mounting Support

Model(①Code) —

KTACQ

②DH7

D8



● Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation



Price Excluding Tax (¥/unit)

■ Hexagonal Post Mounting Bracket



CAD 2D 3D

Code	Type	Material		Surface Treatment	Accessory
		International	Equivalent		
KSACQ	Upper End Threaded Type	Q235	SS400	Black Oxide Finish	Hex Socket Head Cap Screw
KSACR				Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)
KSBCQ	Side Threaded Type	Q235	SS400	Black Oxide Finish	Hex Socket Head Cap Screw
KSBCR				Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)

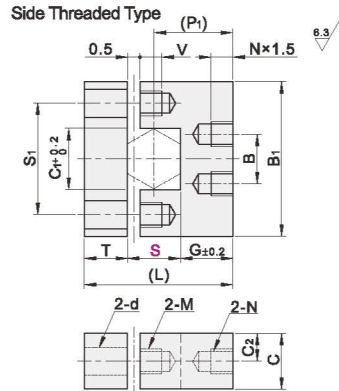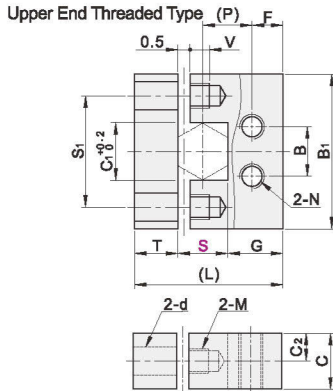

① The S dimension corresponds to the S dimension of the hexagonal post.




Model		(P)	(P1)	B1	C	F	G	C1	C1	T	S1	d	M	V	B	N	(L)	Accessory Screws (2)
Code	S																	
Upper End Threaded Type	10	11	16	25	12		11	11.5	6		18	3.5	M3	7		M4	27	M3×12
	12					5	12	13.9			22					30		
	13	13	18	32	16		11.5	15.0	8	6	23	4.5	M4	10	12	M5	30.5	M4×15
Side Threaded Type	14	17	25				18	16.2			24					38		
	17					8	19.5	19.6			28					45.5		
	19	20	28	38	22		18.5	21.9	11	9	29	5.5	M5	12	16	M6	46.5	M5×20

■ Base Mounting Support



CAD 2D 3D

Code	Type	Material		Surface Treatment
		International	Equivalent	
KTACQ	Standard Type	Q235	SS400	Black Oxide Finish
KTACR				Electroless Nickel Plating
KTACS	Guidance Type	0Cr18Ni9	SUS304	—
KTBCQ				Black Oxide Finish
KTBCR				Electroless Nickel Plating



① For rust prevention requirements, stainless steel or electroless nickel plated products are preferred.

Model		D2	B	H	D1	T	E	d1	d2	h	F	W	b	P1/7	S	Post Mounting Screws
Code	DH7															
Standard Type	6	+0.012	28	12	16	12	5	9	3.5	6.5	4	20	3.5	12		M3
	8	+0.015	32	15	22	15		12	4.5	8	5	24	4.5	15		M4
	10	0	38	18	26	18		15	5.5	9.5	6	30		18		M5
	12		42	20	32	20	8	18	6.6	11	7			20		M6
	13	+0.018														
Guidance Type	15	0	48	32	40	25		23	9	14	10	32	5.5	25	5	M8
	16						10									
	20		55	38	50	30		31	11	18	12	35	6.6	30		M10
	25	+0.021	75	50	62	38		38	14	20	15	45	9	38		M12
	30	0	80	55	75	45	15	45	18	26	19	50	40	45		M16