

Base Mounting Support

Flange Type with Parallel Sides-Through Hole Type · Slotted Hole Type
Circular Flange Type · Counterbored Type



Please order according to the diagram

①~③ Select the type and parameters in the order for ordering.

① Through Hole Type

Model(●Code) — ② DH7

KUCFV — D8

② Slotted Hole Type

Model(●Code) — ③ DH7

KUCGQ — D8




Disco/Unit Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (¥/unit)



CAD 2D 3D

Code	Type	Material International Equivalent	Surface Treatment
KUCFV	Flange Type with Parallel Sides-Through Hole Type	45	Chromium-Plated
KUCFX		S45C	Electroless Nickel Plating
KUCFW		0Cr18Ni9	Black Oxide Finish
KUCFS		SUS304	—


① For rust prevention requirements, stainless steel or electroless nickel plated products are preferred.



CAD 2D 3D

Code	Type	Material International Equivalent	Surface Treatment
KUCGQ	Flange Type with Parallel Sides-Slotted Hole Type	Q235	Black Chrome Plating
KUCGR		SS400	Electroless Nickel Plating
KUCGS		0Cr18Ni9	SUS304

① For rust prevention requirements, stainless steel or electroless nickel plated products are preferred.

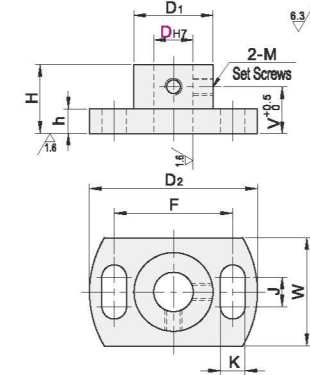

Flange Type with Parallel Sides-Through Hole Type

Model	D2	W	F	D1	H	h	V	K	M
Code	DH7								
6	+0.012	33	18	23	14	20	6	12.5	
8	+0.015	38	20	26	16	30		15	4.5
10		40	22	28	18		8	18	M4
12	+0.018	46	24	32	20	35		20	5.5
15		56	29	40	25	40		25	6.6
20		63	34	46	30	45		25	M5
25	+0.021	78	41	56	37	50	10	30	9
30		82	46	62	42	60		30	M6

Flange Type with Parallel Sides-Slotted Hole Type

Model	D2	W	F	J	K	D1	H	h	V	M
Code	DH7									
6	+0.012	33	18	23		14	20	6	12.5	
8	+0.015	38	20	26	6	16	30		15	M4
10		40	22	28		18	35	8	18	
12	+0.018	46	24	32		5.5	20		20	M5
15		56	29	40		6.6	25	40	20	M5
20		63	34	46	10	30	45	20	25	M6
25	+0.021	78	41	56		37	50	10	30	
30		82	46	62		42	60		30	M6



Please order according to the diagram

①~③ Select the type and parameters in the order for ordering. ④ Optional Processing

Model(●Code) — ② DH7 — ④ KC

KUCHQ — D10 — KC




Disco/Unit Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (¥/unit)





CAD 2D 3D

Without Positioning Holes



With Positioning Holes



① For rust prevention requirements, stainless steel or electroless nickel plated products are preferred.

Circular Flange Type · Counterbored Type

Model	D2	D1	H	h	V	P.C.D	K	K1	M	Support with Positioning Holes Only
Code	DH7									QH7
10	+0.012	55	26	35	18	43	4.5	11		
12	+0.015	67	28			51	5.5	13	M4	6
15		74	31	40	12	56	6.6	15	M5	
20		85	40	45		65				
25	+0.018	99	45	50		75	9	18	M6	8
30		105	50	60		80				
35		117	55	70		90	11	20	M8	10
40	+0.021	124	60	80	15	95				
50		139	70	100		106	14	24	M10	

Optional Processing

Code	Technical Specification
KC	Change Installation Hole Size Increase the size of the installation hole to allow for fine adjustments during installation. 4-K Countersunk K1 DP2
D	Selection Method
K	Selection Method
K1	Selection Method
D	10 6 11.5 ±1 M4
12	7 15 ±1 M5
15	9 17 ±1.5 M6
20	10 19 ±2 M8
25	12 22 ±2 M10
35	15 26 ±2.5 M12
40	18 32 ±3 M12
50	18 32 ±3 M12
①	Applicable Only to Models Without Positioning Holes
②	Comes with 4 screws