

Tubular Support (Assembly) ▶ Tube-Use External Thread Type-Locking Screw Type



Please order according to the diagram

①~③ Select the type and parameters in the order for ordering.

Model(①Code) — ②Specification — ③L
KVFAA — 28 — L820



Discounited Price
 Quantity 1~9 10~
 Price 100% Separate Quotation
 Price Excluding Tax (Yen)




CAD 2D 3D


Code	Type		Material				Surface Treatment
			Tube		Support		
			International	Equivalent	International	Equivalent	
KVFAA	Setscrew Type	Circular Flange Type	Q235	SS400	Q235	SS400	Electroless Nickel Plating
KVFAB							Black Oxide Finish
KVFAC	Setscrew Type		0Cr18Ni9	SUS304	0Cr18Ni9	SUS304	—
KVFBA							
KVFBFB		Opposite Edge Flange Type	Q235	SS400	Q235	SS400	Electroless Nickel Plating
							Black Oxide Finish

① For rust prevention requirements, stainless steel or electroless nickel plated products are preferred.

Circular Flange Type

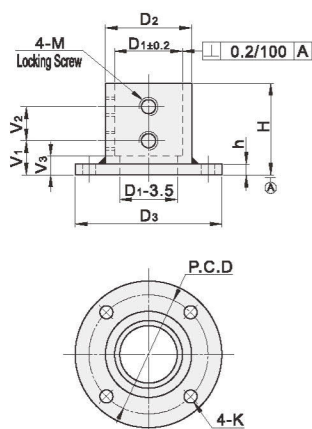

Opposite Edge Flange Type

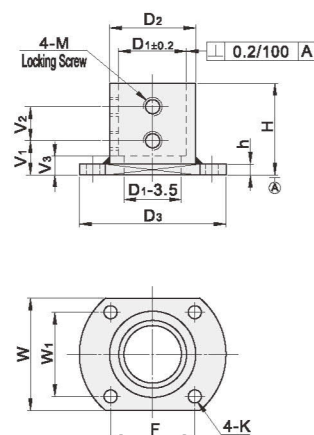

6.3

Model		L	G(PF)		A	B	D		D1	D2	t	(t1)
Code	Specification		Nominal Thread	Thread Diameter								
Circular Flange Type	28	200~820	G1	33.25	26	23	40	±0.40	40.5	54	7	3.6
	36		G1 1/4	41.91	29	26	50.8	±0.41	51.5	65	8	3.6
	42	200~1020	G1 1/2	47.80							5	3.5
	54		G2	59.61	30	27	60.5	±0.49	61	76.3	4	3.6
Opposite Edge Flange Type	70	300~1020	G2 1/2	75.18	35	32	76.3	±0.56	77	89.1	5.5	4.9
	82		G3	87.88	40	37	89.1	±0.90	90	101.6	7	6.3
	92		G3 1/2	100.33			101.6	±1.02	102	120	6	5.3

Model		D3	P-C-D	K	M	h	H	V1	V2	V3	W	F	W1
Code	Specification												
Circular Flange Type	28	100	80				60	26	25		63	62	44
	36	110	90		M6	10	75	31	30	15	73	74	50
	42	120	100	9			90	36	40		89	76	70
	54	130	110				105		45		99	80	80
Opposite Edge Flange Type	70	140	120		M8	12	120	41	60	20	109	86	90
	82	160	140				150		90		129	94	110
	92												