

Square Bracket for Base

Standard Type · Oblong Hole Type/Simplified Type/Without Flange Type Side Mount Type



Please order according to the diagram

①~② Select the type and parameters in the order for ordering.

■ Simplified Type

Model(①Code)

KWAHA

— D_{H7}

D20

■ Without Flange Type

Model(①Code)

KWAIA

— D_{H7}

D10



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation



Price Excluding Tax (Yen)

Mounting Parts
Base - Post Clamps
31





CAD 2D/3D

Standard Type



Oblong Hole Type



■ Standard Type · Oblong Hole Type

Model	Code	D _{H7}	A	B	L	T	G	F	F ₁	J	K	h	H	E	d	d ₁	Z	M	W
Standard Type Type	(10)	$^{+0.018}_0$	40	35	32	10	18	30	—	—	4.4	15	10.5	20	5.5	9	6	M5	—
	(12)	$^{+0.018}_0$	44	35	32	10	18	34	—	—	5.5	14	11.5	22	5.5	9	6	M5	—
	(15)	$^{+0.021}_0$	50	40	38	12	20	38	—	—	6.6	18	12.5	25	6.6	11	7	M6	2
	(16)	$^{+0.021}_0$	50	40	38	12	20	38	—	—	6.6	18	12.5	25	6.6	11	7	M6	2
	20	$^{+0.021}_0$	65	45	45	12	25	50	47.5	5.5	—	22	15	30	9	14	9	M8	—
	25	$^{+0.021}_0$	80	60	60	15	36	60	57.5	7.5	9	27	18	35	9	14	9	M8	—
	30	$^{+0.025}_0$	90	60	60	15	36	70	67.5	9.5	11	30	21	45	11	17.5	11	M10	3
	35	$^{+0.025}_0$	105	80	68	15	40	80	77.5	—	—	35	24	50	11	17.5	11	M10	3
	40	$^{+0.025}_0$	115	80	76	15	40	90	87.5	—	—	38	27	60	11	17.5	11	M10	3
	50	$^{+0.025}_0$	135	100	87	18	50	105	102.5	12.5	14	43	33	70	11	17.5	11	M10	3



① The specifications within () do not apply to oblong hole types.

■ Simplified Type/Without Flange Type




CAD 2D/3D

Simplified Type



Side Mount Type	Material	Surface Treatment	Accessory(Screws)
Simplified Type	International	Black Oxide Finish	Hex Socket Head Cap Screw
Without Flange Type	Equivalent	Electroless Nickel Plating	Hex Socket Head Cap Screw (Stainless Steel)
		Black Anodizing	Hex Socket Head Cap Screw
		Natural Anodizing	Hex Socket Head Cap Screw (Stainless Steel)
		—	—

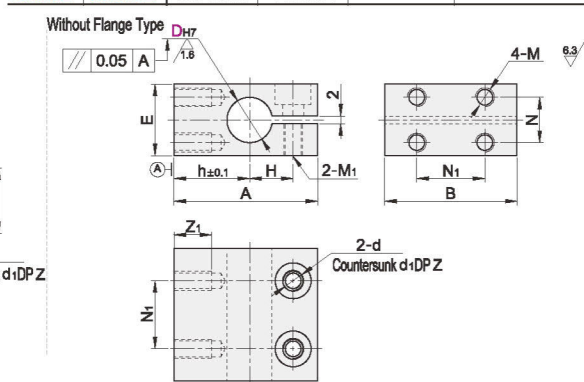

■ Simplified Type

Model	Code	D _{H7}	A	B	L	T	F	G	K	h	H	E	d	d ₁	Z	M	W
(20)	20	$^{+0.021}_0$	60	30	45	12	45	18	6.6	22	15	30	6.6	11	6.5	M6	2
(25)	25	$^{+0.021}_0$	73	45	53	12	54	30	9	27	18	35	9	14	9	M8	—
(30)	30	$^{+0.021}_0$	83	45	60	12	64	30	9	30	21	45	9	14	9	M8	—
(35)	35	$^{+0.025}_0$	94	60	68	15	72	35	11	35	24	50	11	17.5	11	M10	3
(40)	40	$^{+0.025}_0$	104	60	76	15	82	38	11	38	27	60	11	17.5	11	M10	3
(50)	50	$^{+0.025}_0$	118	75	87	18	94	45	14	43	33	70	11	17.5	11	M10	3

■ Without Flange Type

Model	Code	D _{H7}	A	B	M	N	N ₁	Z ₁	h	H	E	d	d ₁	Z	M ₁	Accessory (Screws)
(10)	10	$^{+0.015}_0$	35	35	M4	10	18	8	18	10.5	15.5	5.5	8	4.5	M4	M4-L20 2个
(12)	12	$^{+0.015}_0$	38	35	M5	12	18	10	20	11.5	18.5	5.5	9.5	5.5	M5	M5-L25 2个
(15)	15	$^{+0.015}_0$	45	40	M6	13	20	12	25	12.5	22.5	6.6	11	6.5	M6	M6-L35 2个
(20)	20	$^{+0.021}_0$	53	45	M8	18	25	12	30	15	29.5	6.6	11	6.5	M8	M8-L40 2个
(25)	25	$^{+0.021}_0$	59	59	M8	17	25	12	33	18	34.5	6.6	11	6.5	M8	M8-L45 2个
(30)	30	$^{+0.021}_0$	67	60	M8	29	36	16	37	21	44.5	9	14	9	M8	M8-L50 2个

① KWAKC/AK/D/AKE No Specification with () ② D_{H7} tolerance and perpendicularity are tolerances before opening.

③ The recommended tolerances for mating shafts are g6 and f8