

Mounted Bearing ▶ Double bearing flange type

Non-retainer type with L size specification



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering

Model(①Code) — Bearing Model — Seal ring — L — NA

YCENO

624

DD

L35

NA

Optional Processing




Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)



CAD 3D

Type			Material		Surface Treatment
Round Flange Type	Square Flange Type	Opposite Edge Flange Type	Bearing	Bearing Housing	Bearing Housing
YCENO	YCETO	YCEWO	Steel	S45C	Black Oxide Finish
YCENP	YCETP	YCEWP			Electroless Nickel Plating
YCENT	—	YCEWT	Stainless Steel	A2017	Natural Anodizing
YCENU	—	YCEWU			
YCENQ	YCETQ	YCEWQ		SUS304	—

■ Bearing accuracy: GB/T 307.10 Grade, Equivalent to JIS B 15140 Grade.

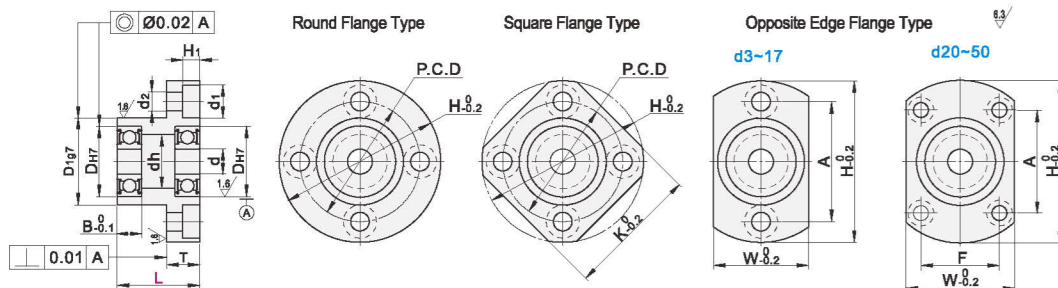

Code	Model	Seal Rings	Minimum Unit 1	d	D _{H7}	B	H	W	T	dh	D _{1g7}	P.C.D	K	A	F	d ₁	d ₂	H ₁
Round Flange Type YCENO YCENP YCENT YCENU YCENQ	623	ZZ (Double-lid type)	20~40	3	10	4	33	16	7	7	14	24	27	24		6.5	3.7	3.3
	624			4	13	5	35	18		9	17	26	28	26				
	605			5	14		36	20		10	18	28	30	28				
	625				16		38	22		12	20	28	31	28				
	606			6	17	6	39	23		13	21	29	32	29		8	4.7	4.3
	626				19		41	25		15	24	31	34	31				
	678			25~50	12	3.5	34	18		10	16	25	27	25		6.5	3.7	3.3
	698			20~40	19		41	25		15	24	31	34	31				
	608				22		45	29		18	27	35	36	35				
	628			25~50	24	8	47	32		20	30	37	37	37				
	6700				15		47	22		12	19	27	30	27				
	8800			20~40	19	5	41	25	8	15	24	31	34	31				
	6900				22	6	45	29		19	27	35	36	35				
	6000			25~60	26	8	50	34		22	32	40	39	40				
	6200				30	9	54	38		24	36	44	42	44	—	8	4.7	4.3
	6701			20~40	18	4	40	25		15	23	30	31	30				
Square Flange Type YCETO YCETP YCETQ	6801	VZ (Non-contact rubber seal ring)	20~60	21	5	44	29			17	26	34	35	34				
	6901				24	6	48	31		21	30	38	38	38				
	6001			25~60	28	8	52	36		24	34	42	40	42				
	6201			30~70	32	10	56	40		26	38	46	43	46				
	6702				21	4	44	29		18	26	34	35	34				
	6802			20~60	24	5	47	32		20	30	37	37	37				
	6902				28	7	57	37		25	35	45	45	45				
	6002			20~70	32	9	60	40		28	38	48	46	48		9.5	5.7	5.3
	6202			25~70	35	11	64	44		29	42	52	49	52				
	6803			25~60	26	5	50	34		22	32	40	39	40		8	4.7	4.3
	6903				30	7	60	38	10	27	36	48	46	48				
	6003			35~70	35	10	66	44		31	42	54	50	54		9.5	5.7	5.3
	6203				40	12	72	50		34	48	60	54	60				
	6704			30~70	27	4	51	35		23	33	41	39	32	25	8	4.7	4.3
	6804			35~70	32	7	60	40		28	38	48	46	38	29	9.5	5.7	5.3
	6904				37	9	69	47		34	45	56	54	51	24			
Opposite Edge Flange Type YCEWO YCEWP YCEWT YCEWU YCEWQ	6004	DD (Contact rubber seal ring)	45~80	42	12	77	54			36	50	64	59	56	32			
	6204				47	14	81	58	11	40	54	68	62	59	34	11	6.8	6.3
	6805			35~70	37	7	69	47		34	45	56	54	51	24			
	6905				42	9	77	54		36	50	64	59	56	32			
	6005			45~80	47	12	88	58		41	54	72	67	63	36	14	9.2	8.3
	6205				52	15	94	64		45	60	78	72	68	39			
	6806			35~70	42	7	77	54	13	36	50	64	59	56	32	11	6.8	6.3
	6906				47	9	88	58		41	54	72	67	63	36			
	6006			45~80	55	13	96	66		48	62	80	73	70	40	14	9.2	8.3
	6206				62	16	104	74		55	70	88	79	77	44			
	6007			50~120	72	17	126	88	20	64	84	105	95	92	51	17.5	11.2	11.2
	6207				78	15	114	82	13	60	78	96	86	80	54	14	9.2	8.3
	6008				80	18												
	6208			60~120	80	16	134	96	20	74	92	113	102	98	56	17.5	11.2	11.2
	6010				90	20	147	110		83	106	126	—	104	72			
	6210																	

※ VZ(Non-contact rubber seal ring) is not applicable to bearings of model 623,624,605,606.
※ VZ(Non-contact rubber seal ring),DD(Contact rubber seal ring), bearing material: steel.

Optional Processing

Code	Do not assemble the bearing and retainer ring
NA	
Technical Specification	Not assembled with bearings and retainers (shipped separately)