

Mounted Bearing ▶ Single bearing L type

Height h option type/Height h specification type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering

■ Height h option type

Model(①Code) — ②Bearing Model — ③Seal ring — ④h — KK KC NA

YCHAO

624

ZZ

h20

NA

■ Optional Processing(Height h option type)



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation


Price Excluding Tax(¥/ea)



CAD 2D 3D

Code	Type	Material			Surface Treatment
		Bearing	Bearing Housing	Retaining Ring	
YCHAO	Height h option type	Steel	S45C	Spring steel	Black Oxide Finish
YCHAP			A2017	SUS304	Electroless Nickel Plating
YCHAT		Stainless Steel	SUS304	Spring steel	Natural Anodizing
YCHAU			SUS304	Spring steel	Black Oxide Finish
YCHAQ	Height h specification type	Steel	S45C	Spring steel	Black Oxide Finish
YCHBO			A2017	SUS304	Electroless Nickel Plating
YCHBP		Stainless Steel	SUS304	Spring steel	Black Oxide Finish
YCHBT			SUS304	Spring steel	Black Oxide Finish
YCHBQ					

■ Bearing accuracy: GB/T 307.10 Grade, Equivalent to JIS B 15140 Grade.

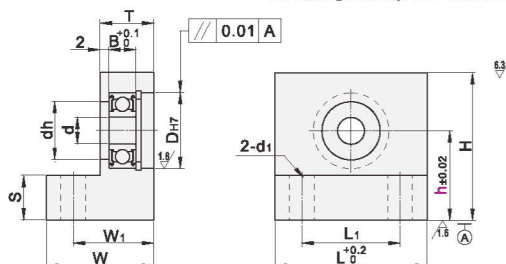

Model			h		d	D _{H7}	dh	B	H	L	L ₁	W	W ₁	T	S	d ₁
Code	Bearing Model	Seal Rings	Height option type	Height specification type Minimum Unit 0.5												
Height h option type	623	ZZ (Double-lid type) ※VV (Non-contact rubber seal ring)	10 15 20 25	10~30	3	10	^{+0.015} ₀	7	4	h+8.8	20	10	20	15	10	4.8
	624				4	13		9		h+10.8	22	12	20			4.3
	605				5	14	^{+0.018} ₀	10	5	h+11.8	24	14				
	625					16		12		h+12.8	28	16	22	16		
	606		20 25 30	20~30	6	17		13	6	h+12.8	34	22				
	626					19		15		h+13.8	36	24	24	18	12	
	608		20 25 30 40	20~30	8	22		18	7	h+14.8	38	26				
	628					20		8		h+15.8	34	22	27	21	15	
	6900		25 30 40	25~40	10	22	^{+0.021} ₀	19	6	h+14.8	32	20	24	18	12	9.8
	6000					26		22	8	h+17.8	38	26				
	6200				12	30		24	9	h+18.9	40	28	27	21	15	
	6901					24		21	6	h+15.8	36	24	24	18	12	
	6001		30 40 50	30~50	15	28	^{+0.025} ₀	24	8	h+17.8	40	28	27	21	15	
	6201					32		26	10	h+19.8		28	22	16		
	6902				17	28	^{+0.021} ₀	25	7	h+17.8	42	30	24	18	12	
	6002					32	^{+0.025} ₀	28	9	h+19.8	50	36	29	22	15	14.8
Height h specification type	6202	DD (Contact rubber seal ring)	40 50	40~50	15	35	^{+0.025} ₀	29	11	h+21.8	44		31	24	17	
	6903					30	^{+0.021} ₀	27	7	h+18.8	42		26	20	13	
	6003		30 40 50	30~50	17	35		31	10	h+21.8	50		31	24	16	12.3
	6203					40		12		h+23.8	48		33	26	20	
	6904		35 40 50 60	35~60	20	37	^{+0.025} ₀	34	9	h+22.8	45	31	29	22	15	
	6004					42		36	12	h+24.8	54	38	35	27	19	
	6204				25	47		40	14	h+27.8	60	44	36	28	20	14.8
	6005					41		12		h+27.8	62	46	35	27	19	
	6205		40 50 60	50~80	30	52	^{+0.030} ₀	45	15	h+30.8	70	50	42	32	22	
	6006					55		48	13	h+31.8	74	54	40	30	20	19.8
	6206					62		55	16	h+35.8	82	62	43	33	23	11

※ VV(Non-contact rubber seal ring) is not applicable to bearings of model 623,624,605,606. ※ VV(Non-contact rubber seal ring), DD(Contact rubber seal ring), bearing material: steel.
 ① Please note to avoid the retainer ring, refer to the retainer ring size for reference P851.

Optional Processing

Code	Increase chamfering on both sides		Increase chamfering C2		Do not assemble the bearing retainer ring								
	KK		KC			NA							
Technical Specification	Selection Method KK		Selection Method KC		Selection Method NA								
	 <table><tr><td>d</td><td>KK</td></tr><tr><td>3~8</td><td>5</td></tr><tr><td>10~20</td><td>10</td></tr><tr><td>25~30</td><td>12</td></tr></table>		d	KK	3~8	5	10~20	10	25~30	12			Not assembled with bearings and retainers (shipped separately)
d	KK												
3~8	5												
10~20	10												
25~30	12												