

Locking Collar ▶ Open type Internal Thread Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

Model(①Code)

UBJCP

② M

M3

③ B

B8



Discounted Price

Quantity	1~9	10~
Price	100%	Separate Quotation

Price Excluding Tax (¥/unit)


Custom-made Inventory



CAD 2D 3D

Code	Type	Thread	Material		Surface Treatment	Accessories
			International	Equivalent		
UBJCP	Internal Thread Type	Coarse Thread	45	S45C	Black Oxide Finish	1 Set Hexagon Socket Head Cap Screw
UBJCQ			—	—	Electroless Nickel Plating	1 Set Hexagon Socket Head Cap Screw (Stainless Steel)
UBJCR			0Cr18Ni9	SUS304	—	—
UBJXP		Fine Thread	45	S45C	Black Oxide Finish	1 Set Hexagon Socket Head Cap Screw
UBJXQ			—	—	Electroless Nickel Plating	1 Set Hexagon Socket Head Cap Screw (Stainless Steel)
UBJXR			0Cr18Ni9	SUS304	—	—

❗ If rust prevention is required, stainless steel material or electroless nickel plating products are preferred

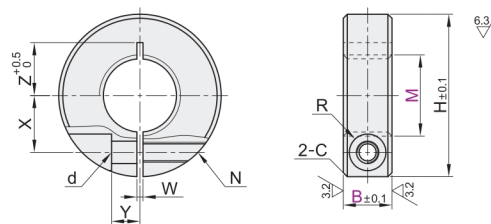

Model		③ B	M×P		H	N	d	R	W	X		Y	Z	C
① Code	② M		Coarse Thread	Fine Thread						Coarse Threaded	Fine Threaded			
Coarse Thread	3	8	M3×0.5	M3×0.35	16	M3	3.4	3	1.0	4.5	4.5	2.2	3~5	0.6
	4		M4×0.7	M4×0.5	18					5	5	3	3.5~6	
	5		M5×0.8	M5×0.5	20					5.5	5.5	4	5~6.5	
	6		M6×1.0	M6×0.75	25					6	6	—	6~6.5	
	8		M8×1.25	M8×0.75	—					8	8	—	8~9	
	(8A)	10	—	M8×1.0	—	M4	4.5	3.75	—	—	8	—	—	—
	10		M10×1.5	M10×0.75	—					9	—	—	—	
	UBJCP		—	M10×1.0	30					—	9	5	10	
	UBJCQ		—	M10×1.25	—					—	—	—	—	
	UBJCR		M12×1.75	M12×1.0	—					10	10	—	9~10	
Fine Thread	(12B)	12	—	M12×1.25	34	M5	5.5	4.5	1.5	—	11.5	—	10~11	1
	(14)		M14×1.5	M14×1.0	35					12.5	12	6	11~12	
	UBJXP		M16×2.0	M16×1.0	—					—	12.5	—	12~13	
	UBJXQ		—	M18×1.5	40					—	—	—	—	
	UBJXR		M20×2.5	M20×1.0	45	M6	6.6	6	—	14	14	—	13	
	(20A)	15	—	M20×1.5	—					—	—	7	14~15	
	(22)		M24×3.0	M22×1.5	—					17	17	—	16	
	24		—	M25×1.5	55					—	—	8	17~20	
	(25)		—	M27×1.5	—					—	—	10	18~20	
	(27)		M30×3.5	M30×1.5	—					20	20	—	—	
	30		—	—	—					—	—	—	—	

❗ () Inner Specification Not Applicable to Coarse Thread

❗ Coarse Thread's W Dimension for Specification 5 is 1.5

❗ Coarse Thread's W Dimension for Specification 5 is 1.5