

Idler Pulley for Flat Belt ▶ Straight Cylinder Type

L=38~350



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

■ L=38~90

Model(①Code) — ②D — ③L
VUPAH — D25 — L38

■ L=80~350

Model(①Code) — ②D — ③L
VUPBH — D40 — L100



● Discounted Price
Quantity Price 1~9 10~
100% Separate Quotation

Price Excluding Tax (Yuan)



■ L=38~90





CAD 2D 3D

■ Bearing accuracy: GB/T 307.1 Grade 0
Equivalent : JIS B 154 Grade 0

D=20 • 25 • 30 • 35 • 40

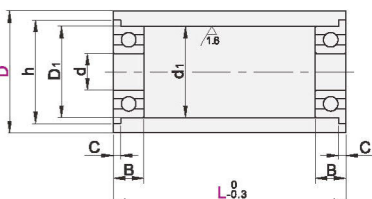

D=30A • 40A



Code	Type	Material		Bearing	Surface Treatment
		National Standard	Equivalent		
VUPAH	Straight Cylinder Type	45	S45C	Steel	Black Oxide Finish
VUPAN		LF2	A5052		Electroless Nickel Plating
VUPAV		0Cr18Ni9	SUS304	Stainless Steel	Natural Anodizing
VUPAU		Blue POM	Blue POM		—

① If rust prevention is required, stainless steel or electrolytic nickel plating products are preferred.



Model		L Selection				d	d ₁	Bearing size				
Code	D							Model	D ₁	B	C	h
VUPAH VUPAN VUPAV VUPAU VUPAP	20	38 45 50 60	6	15	YJC 696ZZ×2	15	5	1.2	17			
	25	38 45 50 60 70		YJC 606ZZ×2	17	6	19					
	30	38 45 50 60 70 85		17	YHJ 698ZZ×2	19	—	—				
	30A	38 45 50 60 70 85										
	35	38 45 50 60 70 85 90	8	22	YJC 608ZZ×2	22	7	1.5	25			
	40	38 45 50 60 70 85 90										
	40A	38 45 50 60 70 85 90								10	YKY6000ZZ×2	26

■ L=80~350





CAD 2D 3D

D30

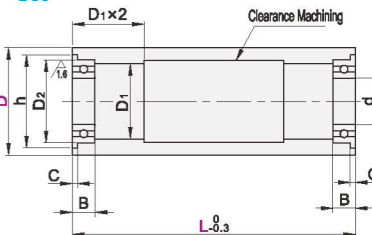

D40

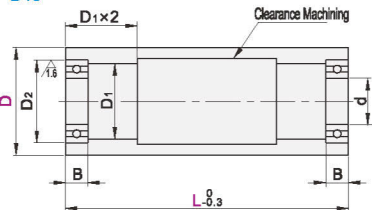

Code	Type	Material		Surface Treatment
		National Standard	Equivalent	
VUPBH	Straight Cylinder Type	45	S45C	Black Oxide Finish
VUPBV		LF2	A5052	Natural Anodizing
VUPBP		Blue POM	Blue POM	—

Model		L Minimum Unit 10	d	D ₁	Bearing size				
Code	D				Model	D ₂	B	C	h
VUPBH VUPBV VUPBP	30	80~350	8	9	YJC 678ZZ	12	3.5	0.8	13.6
	40		12	17	YKY 6801ZZ	21	5	—	—