

Idler pulley for round belt ▶ Widened type • Standard type / External thread type



Please order according to the diagram

① ~ ③ Select the type and parameters in the order of for ordering

Model(①Code) — ②A — ③R
VUQCH — A20 — R1



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)




CAD 2D
6.0

■ Bearing accuracy: GB/T 307.1 Grade 0
Equivalent : JIS B 154 Grade 0

Code	Type	Main Body			External thread			Bearing
		National Standard	Equivalent	Surface Treatment	National Standard	Equivalent	Surface Treatment	
VUQCH	Standard type	45	S45C	Black Oxide Finish	—	—	—	Steel
VUQCN		LF2	A5052	Electroless Nickel Plating	—	—	—	—
VUQCV		0Cr18Ni9	SUS304	Natural Anodizing	—	—	—	Stainless Steel
VUQCU	Widened type	45	S45C	Black Oxide Finish	45	S45C	—	Steel
VUQDH		LF2	A5052	Electroless Nickel Plating	—	—	—	—
VUQDN		0Cr18Ni9	SUS304	Natural Anodizing	—	—	—	Stainless Steel
VUQDV	External thread type	45	S45C	Black Oxide Finish	45	S45C	—	Steel
VUQDU		LF2	A5052	Electroless Nickel Plating	—	—	—	—
VUQDU		0Cr18Ni9	SUS304	Natural Anodizing	—	—	—	Stainless Steel


① If rust prevention is required, stainless steel or electrolytic nickel plating products are preferred.

Standard type



- ① Bearings are adhesive type
- ② External threaded pins are riveted.

External thread type

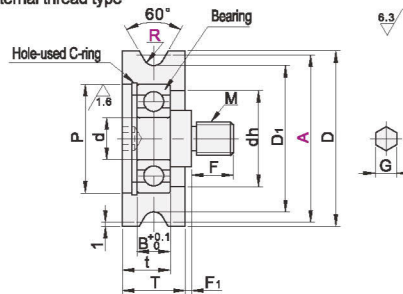

Model	Code	A	R	d	P	dh	D	D ₁	T	t	B	Standard bearing	M	G	F	F ₁	Applicable diameter for round belts
Standard type	(15)	1	3	10	8	17	13	10	6.5	4	YHJ 623ZZ	—	—	—	—	—	2
	(20)	1	5	16	13	22	18	12	7.5	5	YHJ 625ZZ	—	—	—	—	—	3
	(30)	1.5	4	13	11	22	17	10	7.5	6	YHJ 624ZZ	—	—	—	—	—	4
	(20)	1.5	6	19	16	32	27	12	9	6	YHJ 626ZZ	M6	3	10	1	—	5
	(23)	1.5	5	16	13	25	19	10	7.5	5	YHJ 625ZZ	—	—	—	—	—	6
	28	2	6	19	16	30	24	12	9	6	YHJ 628ZZ	M6	3	10	1	—	7
	30	2	6	19	16	32	26	12	9	6	YHJ 628ZZ	M6	3	10	1	—	8
	40	2	10	26	23	42	36	15	11.5	8	YKY6000ZZ	M8	5	12	1.5	—	9
	48	2	12	28	25	50	44	15	11.5	8	YKY6001ZZ	M10	6	15	1.5	—	10
	60	2	12	28	25	62	56	15	11.5	8	YKY6001ZZ	M10	6	15	1.5	—	11
	(23)	2.5	5	16	13	25	18	10	7.5	5	YHJ 625ZZ	—	—	—	—	—	12
	28	2.5	6	19	16	30	23	12	9	6	YHJ 626ZZ	M6	3	10	1	—	13
External thread type	40	2.5	10	26	23	42	35	15	11.5	8	YKY6000ZZ	M8	5	12	1.5	—	14
	48	2.5	10	26	23	50	43	15	11.5	8	YKY6000ZZ	M8	5	12	1.5	—	15
	50	2.5	12	28	25	52	45	15	11.5	8	YKY6001ZZ	M10	6	15	1.5	—	16
	60	2.5	12	28	25	62	55	15	11.5	8	YKY6001ZZ	M10	6	15	1.5	—	17
	28	3	6	19	16	30	22	12	9	6	YHJ 626ZZ	M6	3	10	1	—	18
	38	3	10	26	23	40	32	12	9	6	YKY6000ZZ	M8	5	12	1.5	—	19
	48	3	10	26	23	50	42	12	9	6	YKY6000ZZ	M8	5	12	1.5	—	20
	50	3	12	28	25	52	44	12	9	6	YKY6001ZZ	M10	6	15	1.5	—	21
	60	3	12	28	25	62	54	12	9	6	YKY6001ZZ	M10	6	15	1.5	—	22
	80	3	12	28	25	82	74	12	9	6	YKY6001ZZ	M10	6	15	1.5	—	23
	100	3	12	28	25	102	94	12	9	6	YKY6001ZZ	M10	6	15	1.5	—	24
	50	4	15	32	28	62	50	16	12.5	9	YKY6002ZZ	—	—	—	—	—	25
External thread type	60	4	15	32	28	62	52	16	12.5	9	YKY6002ZZ	—	—	—	—	—	26
	80	4	15	32	28	82	70	16	12.5	9	YKY6002ZZ	—	—	—	—	—	27
	100	4	15	32	28	102	90	16	12.5	9	YKY6002ZZ	—	—	—	—	—	28
	120	4	15	32	28	122	112	16	12.5	9	YKY6002ZZ	—	—	—	—	—	29
	60	5	12	28	25	62	50	15	11.5	8	YKY6001ZZ	—	—	—	—	—	30
	80	5	12	28	25	82	70	15	11.5	8	YKY6001ZZ	—	—	—	—	—	31

① Dimensions with () are not suitable for external thread type.