

Anti-Vibration Leveling Feet ▶ Adjustable Block Type • Metal + Rubber Base

Light Load Type / Medium Load Type / Heavy Load Type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

Model (①Code) — (②D) — (③M) — (④L)
DCABO — D100 — M12 — L100



Price Excluding Tax (Yuan)

Discounted Price


Quantity 1~9 10~
 Price 100% Separate Quotation



CAD 2D 3D

Code	Type	Load	Material			Surface Treatment			Hardness
			Cover	Screw Rod	Bottom	Cover	Screw Rod	Bottom	
DCABO	Adjustable Block Type	Light Load Type							Shore A55±3
DAHBU		Medium Load Type	SPCC	S45C	Chloroprene Rubber (Black)	Diamine Iacquer (Black)	Zinc Plated		Shore A70±3
DBJAO		Heavy Load Type							

❗ The equipment mounting plate must have through holes.

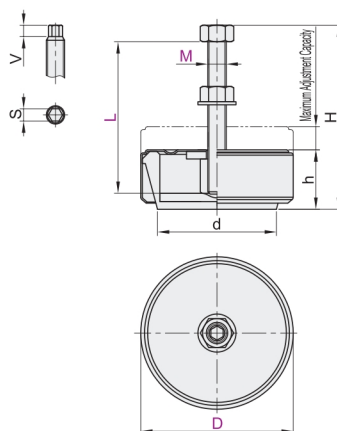

Model		M	L	Vertical Load Range(KN)		H	h	d	S	V	Maximum Adjustment	Mounting Base Thickness	Spring Constant (KN/mm)	Reference Weight (Kg/pcs)
Code	D			Minimum	Maximum									
Light Load Type DCABO	100	12	100 125 200	1.55	3.1	L+31	39	78	8	7.5	18	L-48	1.2	1.2
	150	16		3.1	6.3	L+37	47	114	10	8.5	19	L-55	2.4	1.7
	200	20		6.3	12.5	L+44	56	158	12		25	L-69	4.8	2.2
Medium Load Type DAHBU	100	12	100 125 200	3.15	6.3	L+28	39	78	8	7.5	18	L-51	4.6	1.2
	150	16		6.3	12.5	L+37	47	114	10	8.5	19	L-55	9.2	1.7
	200	20		12.5	25	L+44	56	158	12		25	L-69	18.3	2.2
Heavy Load Type DBJAO	100	12	100 125 200	7.5	15	L+17	35	78	8	7.5	22	L-62	23	1.2
	150	16		15	30	L+21	42	114	10	8.5	24	L-71	46	1.7
	200	20		20	40	L+28	54	158	12		27	L-84	62	2.3

Example

