

Leg Leveling Feet ▶ Universal Adjustable Type • Full Nylon Base Type

Medium to Light Load Type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

Model(①Code) — ②D — ③M — ④L
DEAEO — D40 — M10 — L50




Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yuan)



CAD 2D 3D

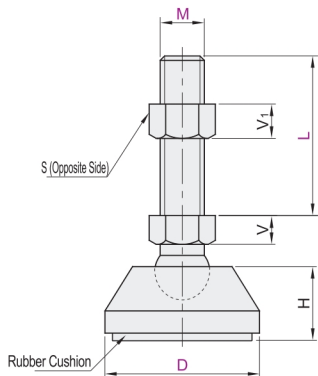

Code	Type	Material		Surface Treatment
		Screw Rod	Bottom	Screw Rod
DEAEO	Full Nylon Base Type	S45C	PA	Chrome Plating
DEAEP		SUS304		—

Features:

- The bottom material is reinforced nylon (PA6), which provides excellent shock absorption and wear resistance.
- Equipped with rubber pads at the bottom to further enhance the non-slip capability of the product.
- The screw is connected between the ball head and the base, allowing for omnidirectional rotation, suitable for maintaining the parallelism of equipment on uneven surfaces.

Model		M	L	S	H	V	V ₁	Vertical Load Capacity (Kg)	Reference Weight (Kg/pcs)	
Code	D								DEAEO	DEAEP
DEAEO DEAEP	10	10	50	17		7	8		0.07	0.07
			100						0.09	0.11
			30						0.07	0.07
	40	12	50	19	18	8	10	350	0.08	0.11
			100						0.12	0.18
			50						0.1	0.12
	14		100	22		9	11		0.14	0.16
			50						0.08	0.08
			100						0.11	0.1
	50	10	50	17		7	8		0.13	0.13
			150						0.08	0.07
			30						0.1	0.1
	12		50	19		8	10	350	0.13	0.15
			100						0.17	0.18
			150						0.17	0.08
	16		100	24		10	13	500	0.22	0.11
			150						0.3	0.19
	10		150	17		7	8		0.16	0.15
			50						0.12	0.11
	12		100	19	22.5	8	10	500	0.15	0.16
			150						0.18	0.19
	14		50	22		9	11		0.14	0.13
			100						0.16	0.19
	60		50						0.2	0.1
		16	80	24		10	13		0.21	0.17
			100						0.24	0.24
	18		150						0.3	0.3
			50	27		12	15	700	0.21	0.13
			100						0.3	0.24
	20		50						0.25	0.16
			100	30		13	16		0.37	0.32
			150						0.47	0.48

Load Capacity Test (Test Model: DEAEO-D60-M20-L150)

