

Gel Shock Absorber Block ▶ Non-Sealed Type / Sealed Type



Please order according to the diagram

① ~ ② Select the type and parameters in the order of for ordering.

① Non-Sealed Type

Model (① Code)

MFCBE

② A

A50



Discounted Price

Quantity 1~9 10~



Price 100% Separate Quotation

Price Excluding Tax (Yen)



Code	Type	Material	Hardness	
			ASKER-C	Penetration
MFCBE	Shockproof Type	Polysilicone	—	55
MFCBF			30	—
MFCCE	Sealed Type	Polysilicone	—	55
MFCCF			30	—

① Hardness Value for Reference Only.

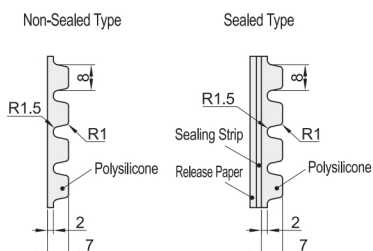

Non-Sealed Type

Model		B	Applicable Load N(kgf)	Displacement Capacity Characteristic N/mm(kgf/mm)	Usage Frequency Hz	Number of Adhesive Pins	Color
Code	A						
MFCBE	50	7	19.6~49(2~5)	22(2.25)	40~	4×4=16↑	Milk White
	100	8	98~196(10~20)	98(10)		8×8=64↑	Milk White
MFCBF	50	7	49~294(5~30)	93(9.5)		4×4=16↑	Light green
	100	8	196~1225(20~125)	431(44)		8×8=64↑	Light green

Sealed Type

Model		B	Applicable Load N(kgf)	Displacement Capacity Characteristic N/mm(kgf/mm)	Usage Frequency Hz	Number of Adhesive Pins	Color
Code	A						
MFCCE	50	7	19.6~49(2~5)	22(2.25)	40~	4×4=16↑	Milk White
	100	8	98~196(10~20)	98(10)		8×8=64↑	Milk White
MFCCE	50	7	49~294(5~30)	93(9.5)		4×4=16↑	Light green
	100	8	196~1225(20~125)	431(44)		8×8=64↑	Light green