

Pneumatic Connection Block

Fixed Spacing Type / Specified Spacing Type

Cross Shape • End-to-End Through Hole



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering.

Model(①Code)

PAFBQ

②Number Side Holes

1K

③R.S.G.K

R1-S5-G1-K5



Price Excluding Tax (¥/unit)


Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Fixed Spacing Type



CAD 2D 3D

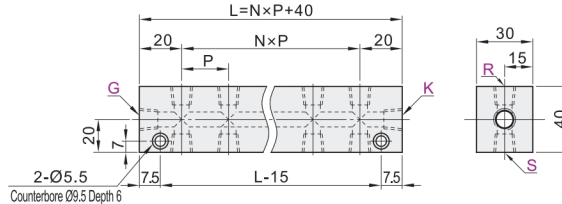

Model		Rc (PT) /M/NPT Selection		Spacing P	N	Number of Threads
Code	Number Side Holes	R·S·G·K				
PAFBQ	1K			30	0	4
	2K	1	(1/8)		1	6
	3K	2	(1/4)		2	8
	4K	5	(M5)		3	10
	5K	1N	(NPT1/8)		4	12
	6K	2N	(NPT1/4)		5	14

① When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

Model(①Code)

PAFCQ

②Number Side Holes

2K

③R.S.G.K

R1-S5-G1-K1

④Spacing P

P20



Price Excluding Tax (¥/unit)


Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Specified Spacing Type



CAD 2D 3D

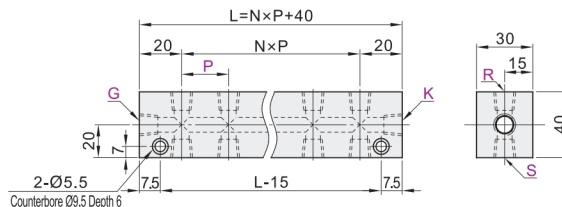

① Please reasonably specify the P value to avoid situations such as joint interference or insufficient disassembly and assembly space.

Model		Rc (PT) /M/NPT Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	R·S·G·K	Minimum Unit		
PAFCQ	2K	1 (1/8)	20~50	1	6
	3K	2 (1/4)		2	8
	4K	5 (M5)		3	10
	5K	1N (NPT1/8)	4	12	
	6K	2N (NPT1/4)	25~50	5	14

① G、K dimension cannot be selected as 5 (M5).

① When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.