

# Pneumatic Connection Block

## Fixed Spacing Type / Specified Spacing Type

### Cross Shape • End-to-End Through Hole



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering.

Model(①Code)

PAFBQ

②Number Side Holes

1K

③R.S.G.K

R1-S5-G1-K5



Price Excluding Tax (¥/unit)


Discounted Price

Quantity 1~9 10~  
Price 100% Separate Quotation

#### Fixed Spacing Type



CAD 2D 3D

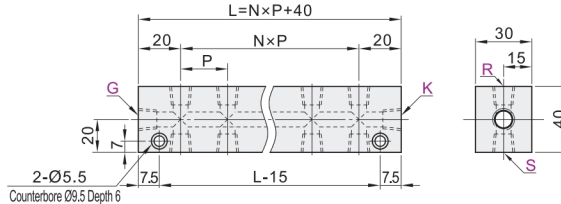

| Model |                   | Rc (PT) /M/NPT Selection |          | Spacing P | N | Number of Threads |
|-------|-------------------|--------------------------|----------|-----------|---|-------------------|
| Code  | Number Side Holes | R·S·G·K                  |          |           |   |                   |
| PAFBQ | 1K                |                          |          | 30        | 0 | 4                 |
|       | 2K                | 1                        | (1/8)    |           | 1 | 6                 |
|       | 3K                | 2                        | (1/4)    |           | 2 | 8                 |
|       | 4K                | 5                        | (M5)     |           | 3 | 10                |
|       | 5K                | 1N                       | (NPT1/8) |           | 4 | 12                |
|       | 6K                | 2N                       | (NPT1/4) |           | 5 | 14                |

① When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

Model(①Code)

PAFCQ

②Number Side Holes

2K

③R.S.G.K

R1-S5-G1-K1

④Spacing P

P20



Price Excluding Tax (¥/unit)


Discounted Price

Quantity 1~9 10~  
Price 100% Separate Quotation

#### Specified Spacing Type



CAD 2D 3D

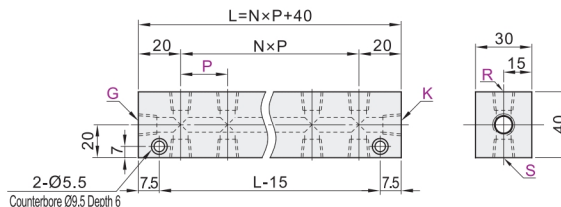

① Please reasonably specify the P value to avoid situations such as joint interference or insufficient disassembly and assembly space.

| Model |                   | Rc (PT) /M/NPT Selection | Spacing P    | N  | Number of Threads |
|-------|-------------------|--------------------------|--------------|----|-------------------|
| Code  | Number Side Holes | R·S·G·K                  | Minimum Unit |    |                   |
| PAFCQ | 2K                | 1 (1/8)                  | 20~50        | 1  | 6                 |
|       | 3K                | 2 (1/4)                  |              | 2  | 8                 |
|       | 4K                | 5 (M5)                   |              | 3  | 10                |
|       | 5K                | 1N (NPT1/8)              | 4            | 12 |                   |
|       | 6K                | 2N (NPT1/4)              | 25~50        | 5  | 14                |

① G · K dimension cannot be selected as 5 (M5).

① When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.