

Pneumatic Connection Block ▶ End-to-End Through Hole • Fixed Spacing Type L Type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

⑤ Side Length: 25x25

Model(①Code)

PALCQ

② Number Side Holes

1K

③ Q.R.G.K

Q4M-R4M-G1-K1

④ Spacing P

P15



Price Excluding Tax (Yuan)

Discounted Price


Quantity 1~9 10~

Price 100% (Separate Quotation)




CAD 20/60


Code	Type	Side Length	Material International Equivalent	Surface Treatment	Normal Pressure
PALCQ	L-shaped End-to-End Through Hole	25×25	LF2	A5052	Natural Anodizing
PALCR		30×40			
PALCS		50×50			
	Fixed Spacing Type				1MPa(≈10.2Kgf/cm ²) Below

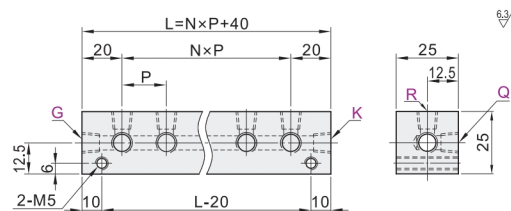

Side Length: 30x40

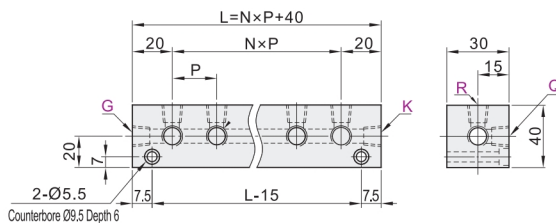

Side Length: 50x50

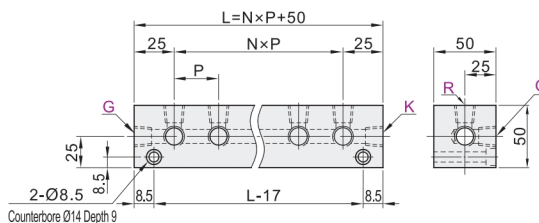

⑤ Side Length: 25x25

Model	Rc(PT)/M Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q·R·G·K		
PALCQ	1K		0	4
	2K	1 (1/8)	1	6
	3K	3M (M3)	2	8
	4K	4M (M4)	3	10
	5K	5 (M5)	4	12
	6K		5	14

① When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.

⑤ Side Length: 30x40

Model	Rc(PT)/M/NPT Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q·R·G·K		
PALCR	1K		0	4
	2K	1 (1/8)	1	6
	3K	2 (1/4)	2	8
	4K	5 (M5)	3	10
	5K	1N (NPT1/8)	4	12
	6K	2N (NPT1/4)	5	14

① When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.

⑤ Side Length: 50x50

Model	Rc (PT) Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q·R·G·K		
PALCS	1K		0	4
	2K		1	6
	3K	2 (1/4)	2	8
	4K	3 (3/8)	3	10
	5K	4 (1/2)	4	12
	6K		5	14

① When the number of side holes is "6K", an additional mounting hole suitable for M8 screws is added at the L/2 position.