

Pneumatic Connection Block

End-to-End Through Hole • Specified Spacing Type
L Type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

② Side Length: 25x25

Model(①Code)

PALDQ

③ Number Side Holes

2K

④ Spacing P

P15



Discounted Price

Quantity 1~9 10~

Price 100% Separate Quotation


Price Excluding Tax (Yuan)




CAD 3D

Code	Type	Side Length	Material International Equivalent	Surface Treatment	Normal Pressure
PALDQ	L-shaped End-to-End Through Hole	25x25	LF2	A5052	Natural Anodizing
PALDR	Specified Spacing Type	30x40			
PALDS		50x50			


Side Length: 25x25

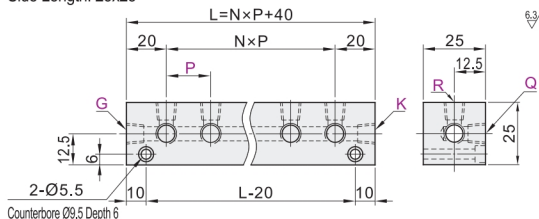

Side Length: 30x40

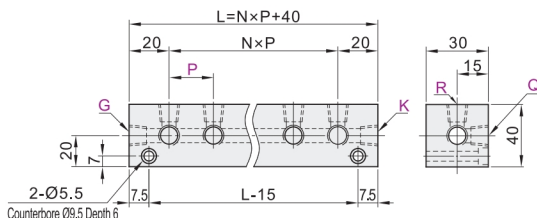

Side Length: 50x50

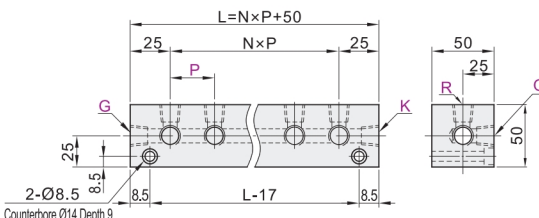

① Please reasonably specify the P value to avoid situations such as joint interference or insufficient disassembly and assembly space.

② Side Length: 25x25

Model		Rc(PT)/M Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q · R · G · K	Minimum Unit		
PALDQ	2K	1 (1/8)	15~50	1	6
	3K	3M (M3)		2	8
	4K	4M (M4)		3	10
	5K	5 (M5)		4	12
	6K			5	14

① G·K dimension cannot be selected as 5 (M5).

② When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.

③ Side Length: 30x40

Model		Rc(PT)/M/NPT Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q·R·G·K	Minimum Unit		
PALDR	2K	1 (1/8)	20~50	1	6
	3K	2 (1/4)		2	8
	4K	5 (M5)		3	10
	5K	1N (NPT1/8)		4	12
	6K	2N (NPT1/4)		5	14

① G·K dimension cannot be selected as 5 (M5).

② When the number of side holes is "6K", an additional mounting hole suitable for M5 screws is added at the L/2 position.

④ Side Length: 50x50

Model		Rc (PT) Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q·R·G·K	Minimum Unit		
PALDS	2K			1	6
	3K	2 (1/4)		2	8
	4K	3 (3/8)	35~60	3	10
	5K	4 (1/2)		4	12
	6K			5	14

① When the number of side holes is "6K", an additional mounting hole suitable for M8 screws is added at the L/2 position.