

Pneumatic Connection Block ▶ T-shaped End-to-End Through Hole • Fixed Spacing Type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

Model(①Code)

PATAQ

②Number Side Holes

1K

③Q.R.S.G.K

Q1-R1-S2-G2-K2

④Spacing P

P30



Price Excluding Tax (¥/mm)

Discounted Price


Quantity 1~9 10~

Price 100% Separate Quotation



CAD 2D 3D

Code	Type	Side Length	Material		Surface Treatment	Normal Pressure
			International	Equivalent		
PATAQ	T-shaped End-to-End Through Hole Fixed Spacing Type	30×40	LF2	A5052	Natural Anodizing	1MPa(≈10.2Kgf/cm ²) Below

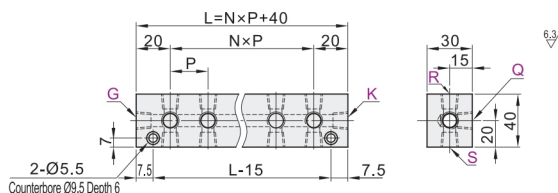

Model		Rc (PT) /M/NPT Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q·R·S·G·K			
PATAQ	1K		30	0	5
	2K	1 (1/8)		1	8
	3K	2 (1/4)		2	11
	4K	5 (M5)		3	14
	5K	1N (NPT1/8)		4	17
	6K	2N (NPT1/4)		5	20

① When the number of side holes is "6K", an additional mounting hole suitable for M6 screws is added at the L/2 position.

[Reference] Recommended Tightening Torque (Exceeding the recommended tightening torque during tightening may cause damage to the threaded part and result in mutual interference of external threads)

Thread Size	M5	R1/8	R1/4	R3/8	R1/2	R3/4
Tightening Torque N·m (kgf·cm)	0.5~1 (5~10)	4~6 (40~60)	7~9 (70~90)	10~13 (100~130)	20~23 (200~230)	30~35 (300~350)