

Oil Pressure/Water Pressure Connection Block ▶ Specified Spacing Type I Type . End-to-End Through Hole



Please order according to the diagram

① ~ ⑤ Select the type and parameters in the order of for ordering.

② Side Length: 30x35

Model(① Code)

PCIBQ

③ Number Side Holes

3K

④ G.K

Q2

⑤ Spacing P

P45



Price Excluding Tax (Yen)

Discounted Price


Quantity 1~9 10~
Price 100% Separate Quotation



CAD 2D 3D


Code	Type	Side Length	Material		Surface Treatment	Normal Pressure
			International	Equivalent		
PCIBQ	I-shaped End-to-End Through Hole	30x35	Q235	SS400	Zinc Plated	20.6MPa(≈210kgf/cm ²) Below
PCIBR			OCr18Ni12Mo2	SUS316	Electroless Nickel Plating	1MPa(≈10.2kgf/cm ²) Below
PCIBS		50x50	Q235	SS400	Zinc Plated	20.6MPa(≈210kgf/cm ²) Below
PCIBT						

Side Length: 30x35

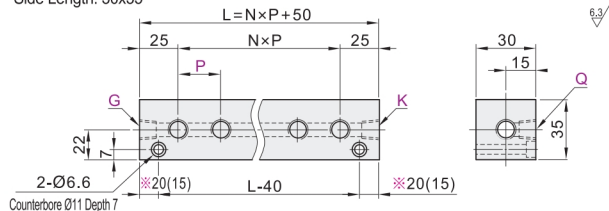

※ When the number of side holes is 1K, the dimensions are within the parentheses.

Side Length: 50x50

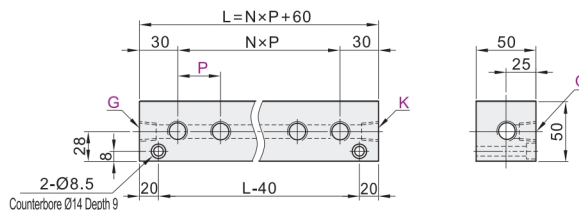

① Please reasonably specify the P value to avoid situations such as joint interference or insufficient disassembly and assembly space.

② Side Length: 30x35

Model		Rc(PT)/NPT Selection		Spacing P Minimum Unit	N	Number of Threads
Code	Number Side Holes	Q	G · K			
PCIBQ PCIBR PCIBS	2K	1 (1/8)	2 (1/4)	25~50	1	4
	3K	2 (1/4)	3 (3/8)		2	5
	4K	3 (3/8)	4 (1/2)		3	6
	5K	1N(NPT1/8)	2N(NPT1/4)		4	7
	6K	2N(NPT1/4)	3N(NPT3/8)		5	8

① When the number of side holes is "6K", an additional mounting hole suitable for M6 screws is added at the L/2 position.

② Side Length: 50x50

Model		Rc(PT) Selection	Spacing P	N	Number of Threads
Code	Number Side Holes	Q · G · K	Minimum Unit		
PCIBT	2K			1	4
	3K	2 (1/4)		2	5
	4K	3 (3/8)	35~60	3	6
	5K	4 (1/2)		4	7
	6K	6 (3/4)		5	8

① When the number of side holes is "6K", an additional mounting hole suitable for M6 screws is added at the L/2 position.