

Concealed Pull Handle ▶ Standard Type • Four External Thread Fixation

Internal Mount Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering.

Model(①Code) — ②A — ③Rubber Pad(Unspecified/Y)

CCDEB

A100

N



Price Excluding Tax (Yuan)

Discounted Price


Quantity 1~9 10~
Price 100% Separate Quotation




CAD 2D 3D

Code	Type	Mounting Hole	Material	Surface Treatment/Color
CCDOG	Standard Type	Flat	SUS304	Brushed
CCDOH		4 External Threads		Mirror Polishing
CCDEA	Semi-Arc Shape	4 External Threads	SUS304	Brushed
CCDEB				Baking Finish(Black)
CCDEC				Brushed

Flat
CCDOG
CCDOH




✿ Cutout Dimensions



Cutout Dimensions

Semi-Arc Shape

CCDEA
CCDEB
CCDEC

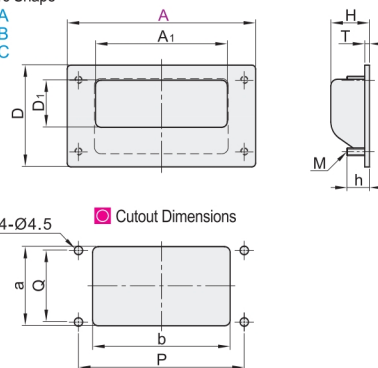

✿ Cutout Dimensions

✿ Flat

Model		Installation Method	C	D	E	H	h	T	M	Cutout Dimensions				Reference Weight (kg/pcs)
Code	A									a	W	V	P	
CCDOG CCDOH	94	G (Screw Type)	61	60	25	17	14	5	M4	76	43	63	32	0.08
	109.5		67.5	64		19.5				88	42	73	38	0.10
	138	M (Nut Type)	96	88	35	26				110	64	99	65	0.17

✿ Semi-Arc Shape

Model		Rubber Pad	A1	D	D1	H	h	T	M	Cutout Dimensions				Reference Weight (kg/pcs)
Code	A									P	Q	a	b	
CCDEA	100	(Without Rubber Pad)	70	54	25	20.5	12	1.5	M4	88	38	42	73	0.09
CCDEB		Unspecified(With Rubber Pad)												
		N (Without Rubber Pad)												
CCDEC		With Rubber Pad												