

Hex Socket Head Cap Screws/Cross Recessed Low Profile Pan Head Combination Screws



Please order according to the diagram

①~③ Select the-Type and parameters in the order of for ordering

④ Hex Socket Head Cap Screws

④ Cross Recessed Low Profile Pan Head Combination Screws

Model(①Code) - ②M - ③L
UOTDQ - M5 - L8

Model(①Code) - ②M - ③L
UOWGQ - M3 - L10




Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yuan)

Hex Socket Head Cap Screws



CAD 2D 3D

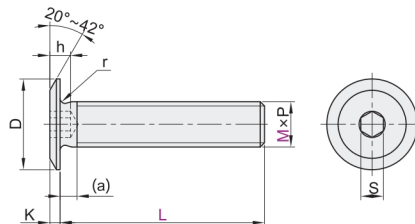


Model		L	P Thread pitch	D	K	S	h	(a)	r (min)
Code	M								
UOTDQ	2	3 4 5 6 8 10	0.4	4	0.5	1.27	1.2	1.2	0.1
	2.5	3 4 5 6	0.45	5	0.6	1.27	1.5	1.2	
	3	5 6 8 10 12 16	0.5	6	0.8	1.5	2	1.4	
	4	5 6 8 10 12 16 20 25	0.7	8	0.9	2	2.5	1.5	0.2
	5	6 8 10 12 16 20 25	0.8	9	1	2.5	3	1.8	
	6	8 10 12 16 20 25	1	10	1.2	3	4	2.2	

Cross Recessed Low Profile Pan Head Combination Screws




CAD 2D 3D


Code	Type	Material		Surface Treatment	Strength Grade
		International	Equivalent		
UOWGQ	combination-Type With Flat Washer and Spring Washer	0Cr18Ni9	SUS304	—	A2-70

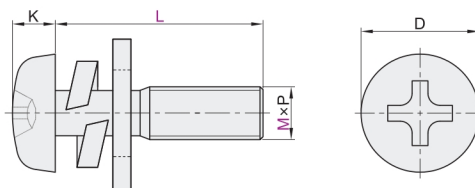

Spring Washer



Flat Washer



Model		L	P Thread pitch	D	K	Spring Washer			Flat Washer		
Code	M					D1	d1	t1	D2	d	t
UOWGQ	3	6 8 10 12 16 18 20 25 30 35 40 45 50	0.5	5.5	2.1	5.43	2.83	0.9	7	2.78	0.5
	4	6 8 10 12 16 18 20 25 30 35 40 45 50 60	0.7	7	2.75	6.2	3.75	1.2	9	3.72	0.8
	5	8 10 12 16 18 20 25 30 35 40 45 50 60	0.8	9	3.45	8.3	4.7	1.4	10	4.66	1
	6	10 12 16 18 20 25 30 35 40 45 50 55 60	1.0	10.5	4.1	10.3	5.7	1.7	12	5.62	1.6
	8	12 16 18 20 25 30 35 40	1.25	14	5.4	12.3	7.6	2.1	16	7.53	2