

Sealing Ring ▶ UN Type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

Model(①Code) - ②d - ③D - ④B
CVCUA - d4 - D10 - B4




Discounted Price

Quantity 1~9 10~
Price 100% (Separate Quotation)

Price Excluding Tax (Yuan)




CAD 2D 3D




Code	Type	Material	Hardness (Shore)	Color	Wide range of operating temperatures	Operating Pressure	Linear Velocity	Application
CVCUA	UN Type	TPU	HS90±5	Blue	-20~100°C	30MPa Within	0.03~0.5m/s	Universal Axial Sliding Single-Direction Seal for Both Holes and Shafts

Installation Method

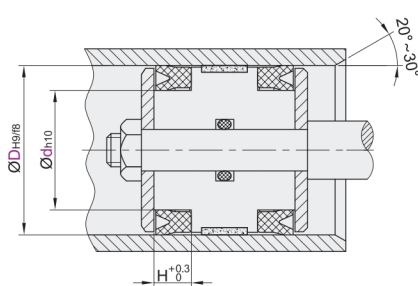

① The inner surface of the piston cylinder should be ground or polished to a roughness of 0.1~0.8µm Ra.

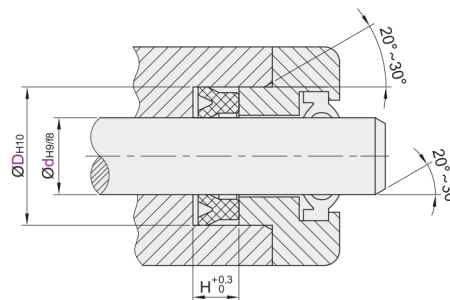

① The surface of the piston rod should be polished to a roughness of 0.2~0.4µm Ra.

Model		D	B	H
Code	d			
CVCUA	4	10	4	4.5
		12		
	5	11	8	9
		12	5	6
	6	12	4	4.5
			6	7
	8	12	5	6
		14	6	7
	9	19	6	7
			8	9
			4	5
		16	6	7
	10		5	6
		18	6	7
		20	8	9
	11.2	19.2	5	6
			5	6
	12	20	6	7
			8	9
	14	22		
	16	24		
	18	26		
	20	28		
	22	30	5	6
	22.4			
	23.5	31.5		
	24	32		
	25	33		

Model		D	B	H
Code	d			
CVCUA	27	35		6
	28	36	5	
	30	40		
	31.5	41.5		
	32	42		
	35			
	35.5	45	6	7
	36	46		
	38	48		
	40	50		
		55		
	45	56	7	8
	50	60		
	53	63		
	55	65	6	7
	56	66		
	58	68		
		70		
	60	71	7	8
	63	73		
	65	75		
	70	80	6	7
	75	85		
	80	90		
	85	100	10	11
	90	105	9	10
	95	110	10	11
	100	115	9	10