

Seal Plug/Seal Washer ► International Series



Please order according to the diagram


①~② Select the type and parameters in the order of for ordering.

Model(①Code) — ②Specification
CVFDT — 10



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (¥/unit)

Seal Plug

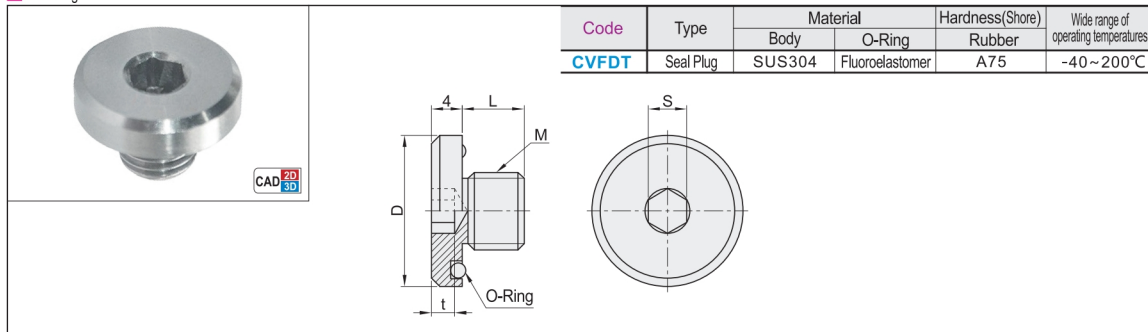

Model Code	Specification	M (Fine Thread)	L	D	S	t	O-Ring	Recommended Tightening Torque (N·M)	Weight (g)
CVFDT	8	M8×1.0	7	16	5	3.5	XTC21-10	10.9	4
	10	M10×1.0	8	19.5		4	XTC21-12.5	13.7	7
	12	M12×1.5	12	21	6	5	XTC21-14	19.2	14
	14	M14×1.5		23			XTC21-16	27.4	19
	16	M16×1.5		25	8	6	XTC21-18	44.5	25



Please order according to the diagram


①~② Select the type and parameters in the order of for ordering.

Model(①Code) — ②Nominal Diameter
CVFBS — 10



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (¥/unit)

Seal Washer

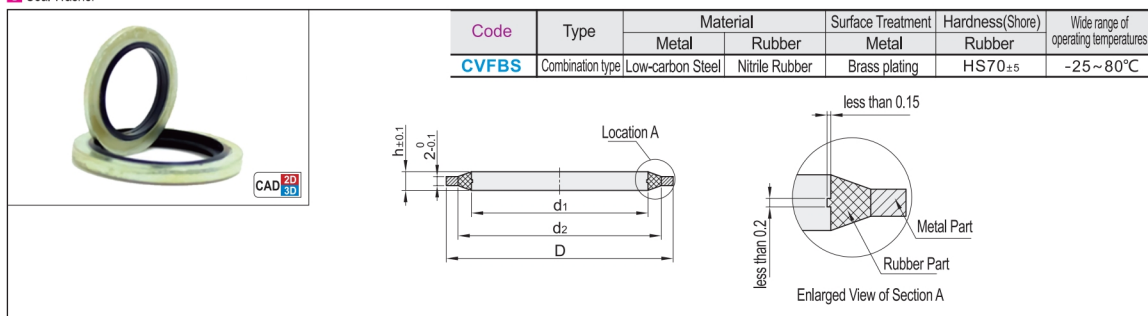

Model Code	Nominal Diameter	d1	d1 Tolerance	d2*	d2 Tolerance	D	D Tolerance	h	Hole d2 Allowable Eccentricity	Applicable Thread Size
CVFBS	8	8.4		10		14				M8
	10	10.4		12		16	0 -0.24			M10 (G1/8")
	12	12.4	±0.12	14	+0.24 0	18				M12
	14	14.4		16		20			0.1	M14(G1/4")
	16	16.4		18		22				M16
	18	18.4		20		25	0 -0.28	2.7		M18(G3/8")
	20	20.5		23		28				M20
	22	22.5		25	+0.28 0	30				M22(G1/2")
	24	24.5	±0.14	27		32				M24
	27	27.5		30		35				M27(G3/4")
	30	30.5		33		38	0 -0.34			M30
	33	33.5		36		42				M33(G1")
	36	36.6		40	+0.34 0	46			0.15	M36
	39	39.6	±0.17	43		50				M39
	42	42.6		46		53				M42(G1 1/4")
	45	45.6		49		56		2.9		M45
	48	48.7		52		60	0 -0.40			M48
	52	52.7	±0.20	56	+0.40 0	66				M52
	60	60.7		64		75				M60(G2")

① Dimensions with * are for reference only