

Floating Joint (Single Piece) ▶ Cylinder Connector • Internal Thread Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering.

Model(①Code) — ②M — ③L
DQRMH — M8 — L50




Price Excluding Tax (¥/unit)

Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation

Standard Type

Code	Type		Material		Hardness	Surface Treatment
	Internal Thread Type	Standard Type	International	Equivalent		
DQRMH			45	S45C	43~48HRC Part Surface High-Frequency Quenching	Black Oxide Finish
DQRMW			9Cr18Mo	SUS440C		—
DQRNH			45	S45C		Black Oxide Finish
DQRNW			9Cr18Mo	SUS440C		—

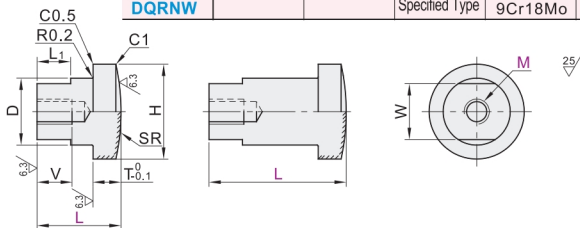

Model		L		Mounting Flange							
Code	M	Fixed Type	Specified Type(Minimum Unit 1)	MxThread pitch	V	D	H	T	W	L ₁	SR
DQRMH DQRMW DQRNH DQRNW	3	15	—	3×0.5	6	12	17	5	10	6	40
	4			4×0.7	8						
	5			5×0.8	10						
	6	20		6×1.0	12	14	19	6	12	8	50
	8			8×1.25	14	16	23		14		
	10	25	30~60	10×1.25	15	20	27	8	17	10	60
	12			12×1.25	18						
	14	35	40~80	14×1.5	21	25	34	10	22	12	
	16			16×1.5	24						
	18	45	50~100	18×1.5	27	32	43	12	27	15	100
	20			20×1.5	30						
	22	55		22×1.5	33	40	52	15	32	18	
	24			24×1.5	36						
	26	60	60~100	26×1.5	39	49	62	16	41	23	200
	30			30×1.5	43				46		
	36	65		36×1.5	45	54	69	18	48	24	250

① SUS440 Quenched parts may discolor due to quenching.



Please order according to the diagram

①~② Select the type and parameters in the order of for ordering.

Model(①Code) — ②M
DQROH — M8




Price Excluding Tax (¥/unit)

Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation

Compact Type

Code	Type		Material		Hardness	Surface Treatment
	Internal Thread Type	Compact Type	International	Equivalent		
DQROH			45	S45C	43~48HRC Part Surface High-Frequency Quenching	Black Oxide Finish
DQROW			9Cr18Mo	SUS440C		—

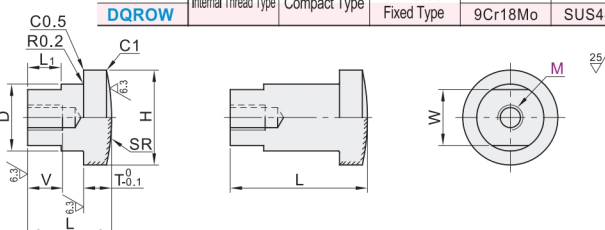

Model		L		Mounting Flange							
Code	M	Fixed Type	Specified Type(Minimum Unit 1)	MxThread pitch	V	D	H	T	W	L ₁	SR
DQROH DQROW	5	17	—	5×0.8	10	12	16		10	6	50
	6	20		6×1.0	12						
	8	23		8×1.25	14						
	10	25		10×1.25	15	16	22	5	13	8	60
	12	29		12×1.25	18						
	14	33		14×1.5	21	22	30	5.5	19	10	
	16	37		16×1.5	24						
	18	41		18×1.5	27	28	36	8	21	12	100
	20	46		20×1.5	30						
	22	50		22×1.5	33	32	42	10	26	15	
	24	55		24×1.5	36						
	26	60		26×1.5	39	38	48	12	32	16	200
	30	65		30×1.5	43	48	58	16	36	18	250

① Compact Type is a dedicated floating joint for cylinders. ② SUS440 Quenched parts may discolor due to quenching.