

Handle/Handle part ▶ Quick handle/female thread installation type

Adjustable locking type



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering

■ Quick handle

Model(①Code) — ②M — ③L — ④Grip Color

SAGOA — M5 — L30 — E



Discounted Price


Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yen)




CAD 2D 3D

Code	Type			Main Body		Screw Rod		Gasket		Thrust washer
				Material	Surface Treatment	Material	Surface Treatment	Material	Surface Treatment	Material
SAGOA	Quick handle	External thread type	With gasket	ZDC	Electrostatic spraying	Q235	Nickel plating	S45C	Nickel plating	PA(Black)

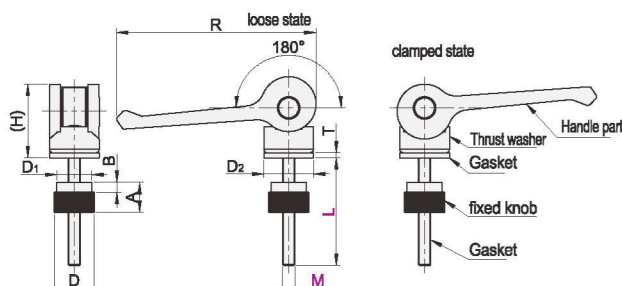

Example

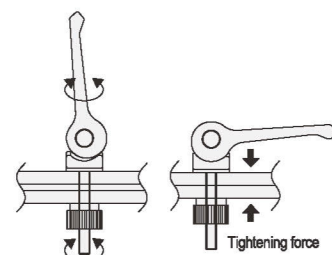

1. Determine the direction of pulling down the handle and adjust the torque using the tightening knob.

2. Pulling down the handle will fix it in place.



Model		L	Grip Color	D	D1	D2	H	R	T	A	B	Tightening force (N)	Handle load (N)	Reference Weight (kg/pcs)
Code	M													
SAGOA	5	30 40	E (Black)	16	14					12	4	1000	18	0.122
	6	40 50		19	16	20	29.5	80	2	14		2000	36	0.136
	8	50 60		24	20					17	5	3000	78	0.170

■ Handleball female thread installation type



CAD 2D 3D

Code	Type	Grip Portion		Inserts Material
		Material	Surface Treatment	
SAJDA	A	PF	—	—
SAJEA	B	PF	—	Brass



Model		D	Grip Color	H	h	Reference Weight (kg/pcs)	
Code	M						
A SAJDA B SAJEA	5	16	E (Black) F (Red)	15	10	0.01	0.01
	6	20		18	12		
	8	25		23	12	0.02	0.02
	10	30		28	16		
	12	35		32	20	0.03	0.03
	16	40		37	25	0.04	
		50		46	30	0.05	0.05
						0.07	0.07