

Drag Chain ▶ Press-to-Open 10 Series with Convenient Operation



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model

Code Internal Height H1

EXAPG - 10

② Internal Width B1

20

③ Bending Radius R

R18

④ Number sections

16

Joint (Single Joint Model for Separate Purchase)

Model

EXAPG-10-11C




Discounted Price

Quantity 1~8 10~


Price 100% Separate Quotation

Price Excluding Tax (¥/m)

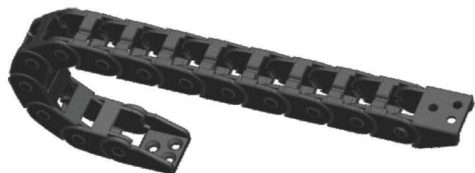


CAD 2D 3D

Schematic Diagram




Main Body

Joint



Suitable for Cables with a Diameter Below 9mm

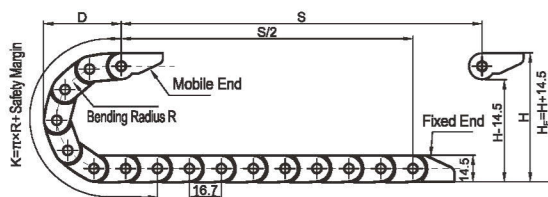

R	H	D	K
18	50.5	52	90
28	70.5	62	122
38	90.5	72	153

Pitch=16.7mm, Number of Links per Meter=60, Chain Length=S/2+K, S=Stroke Distance, K=π x R*“Safety Margin”
Actual Installation Height: H_i=H+14.5mm(Load 0.2kg/m)

Model		Internal Width B:	Bending Radius R	Style	External Height H:	External Width B:	Fixed Joint Type and Parameters							
							Aperture	Hole Spacing				F	Joint Model	
Code	Internal Height H:					A		B	C	E				
EXAPG	10	11	R18	W(Openable)	14.5	17	3.5	8	7	22.3	4	17	EXAPG-10-11C	
		15	R28						22.2	10			22.3	EXAPG-10-15C
		20	R38						27.2	12		25.4	27.3	EXAPG-10-20C

Fixed Joint Type and Parameters (see table above)

