

Drag Chain ▶ Small Press-to-Open 15 Series with Convenient Operation



Please order according to the diagram

①-④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXAPN - 15
② Internal Width B1
15
③ Bending Radius R
R28
④ Number sections
16
EXAPN-15-15C

Joint (Single Joint Model for Separate Purchase)


Model

EXAPN-15-15C



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation

Please Excluding Tax (Yuan)


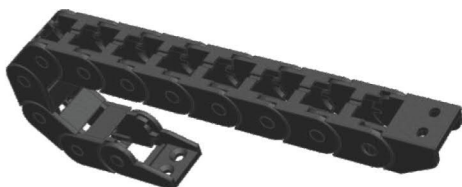


CAD 2D 3D


Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPN	Push to Convenience	Openable	PA6+GF30	Black	-20°C~120°C	Joint

- ⚠ Number of Links per Meter=1000÷Pitch
- ⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram



Suitable for Cables with a Diameter Below 13mm

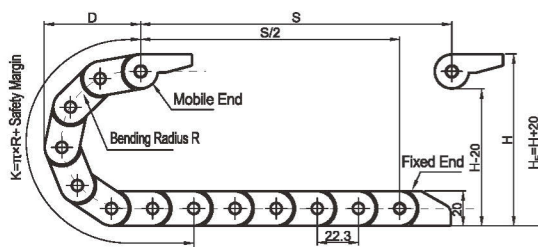


R	H	D	K
28	76	73	133


Pitch=22.3mm, Number of Links per Meter=45, Chain Length=S/2+K, S=Stroke Distance, K=π x R+“Safety Margin”
Actual Installation Height: H=H+20mm(Load 0.3kg/m)

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters															
							Aperture	Hole Spacing						F	Joint Model							
Code	Internal Height H1					A		B	C	E1	E2	F1										
EXAPN	15	15	R28 R38 R48	W(Openable)	20	24	4	8	1	28	12	7	-	24	EXAPN-15-15C							
		20				29					6.5	6.5	-	29.5	EXAPN-15-20C-1(Vertical Hole)							
		30				39					8	8	11		EXAPN-15-20C-2(Horizontal Hole)							
											8.1	8.1	22	39.2		EXAPN-15-30C						


Fixed Joint Type and Parameters (see table above)




EXAPN-15-15C



EXAPN-15-20C-1(Vertical Hole)



EXAPN-15-20C-2(Horizontal Hole)



EXAPN-15-30C