

Drag Chain ▶ Small Bridge-type Drag Chain, Non-openable 18 Series



Please order according to the diagram

①-④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXAPQ - 18

② Internal Width B1
25

③ Bending Radius R
R28


④ Number sections
16

Joint (Single Joint Model for Separate Purchase)

Model
EXAPQ-18-25C



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yuan)

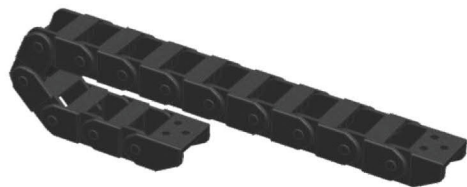

CAD 2D 3D


Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPQ	Bridge-type	Non-openable	PA6+GF30	Black	-20℃~120℃	Joint

- ⚠ Number of Links per Meter=1000+Pitch
- ⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)


Schematic Diagram



Main Body
Joint



Suitable for Cables with a Diameter Below 16mm

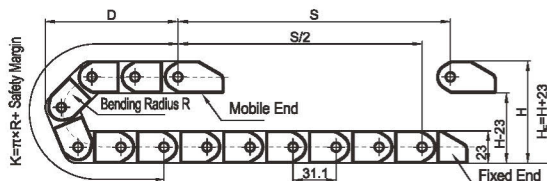


R	H	D	K
28	79	91	151
38	99	101	182
48	119	111	213


Pitch=31.1mm, Number of Links per Meter=33, Chain Length=S/2+K, S=Stroke Distance, K=π x R+Safety Margin
Actual Installation Height: H=H+23mm(Load 0.5kg/m)

Model		Internal Width B ₁	Bending Radius R	Style	External Height H ₂	External Width B ₂	Fixed Joint Type and Parameters								
							Aperture	Hole Spacing					F ₂	F ₃	Joint Model
Code	Internal Height H ₁					A		B	C	E	F ₁				
EXAPQ	18	25	R28 R38 R48	B(Non-openable)	23	36	5.2	10	7.2	33	7.5	-	36	33.3	EXAPQ-18-25C
		37				48.3	5	-	15.8		7	4.3	48.3	45.2	EXAPQ-18-37C

Fixed Joint Type and Parameters (see table above)



EXAPQ - 18 - 25C



EXAPQ -18 - 37C