

Drag Chain ▶ Small Bridge-type Drag Chain, Double-side Opening 25 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXAPU - 25

② Internal Width B1
25

③ Bending Radius R
R40

④ Number sections
16

Joint (Single Joint Model for Separate Purchase)

Model
EXAPU-25-25C



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)





CAD 2D 3D

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXAPU	Bridge-type	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint


⚠ Number of Links per Meter=1000÷Pitch

⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram

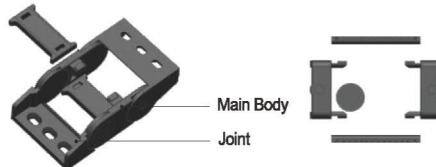

Suitable for Cables with a Diameter Below 22mm

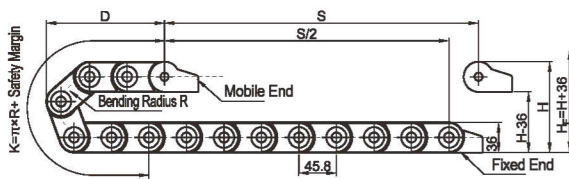


Pitch=45.8mm, Number of Links per Meter=22, Chain Length=S/2+K, S=Stroke Distance, K=π x R+Safety Margin
Actual Installation Height: H=H+36mm(Load 1kg/m)


R	H	D	K
40	116	132	218
55	146	147	265
75	186	167	328
100	236	192	406
125	286	217	485
150	336	242	563
175	386	267	642
200	436	292	720

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters								
Code	Internal Height H1						Aperture	Hole Spacing				F2	F3	Joint Model	
		B	C	E	F1										
EXAPU	25	25	R40 R55 R75 R100 R125 R150 R175 R200	L(Internal Opening)	36	39.4	6.2	16	41.2	11.8	-	39.7	39.8	EXAPU -25-25C	
		38						52.4				23	52.7	52.8	EXAPU -25-38C
		50						64.4				33	64.7	64.8	EXAPU -25-50C
		57						71.4				40	71.7	71.8	EXAPU -25-57C
		77						91.4				60	91.7	91.8	EXAPU -25-77C
		103						117.4				80	117.7	117.8	EXAPU-25-103C

Fixed Joint Type and Parameters (see table above)



EXAPU -25-25C EXAPU -25-38C
EXAPU -25-50C



EXAPU -25-57C EXAPU -25-77C
EXAPU -25-103C



Compatible with Divider Plates
EXAPU - NY

