

Drag Chain ▶ Reinforced Bridge-type Drag Chain, Double-side Opening 25 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1

EXBPC - 25

② Internal Width B1

25

③ Bending Radius R

R40

④ Number sections

16

Joint (Single Joint Model for Separate Purchase)

Model

EXBPC-25-25C




Discounted Price


Quantity 1~9 10~

Price 100% Separate Quotation


Price Excluding Tax (Yen)

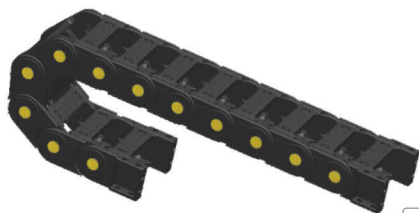

CAD 2D 3D



Suitable for Cables with a Diameter Below 22mm

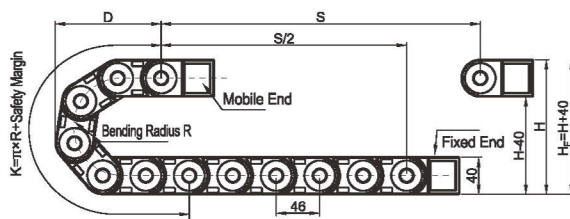


Pitch=46mm, Number of Links per Meter=22, Chain Length=S/2+K, S=Stroke Distance, K=11 x R+“Safety Margin”
Actual Installation Height: Hf=H+40mm(Load 1kg/m)

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXBPC	Colorful Bridge-type	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000÷Pitch


⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram



Main Body


Joint



R	H	D	K
40	120	132	218
55	150	147	265
75	190	167	328
100	240	192	406
125	290	217	485
150	340	242	563
175	390	267	642
200	440	292	720

Model		Internal Width B1	Bending Radius R	Style	External Height H1	External Width B2	Fixed Joint Type and Parameters							
Code	Internal Height H1						Aperture	Hole Spacing					F	Joint Model
								A	B	C	D	E		
EXBPC	25	25	R40 R55 R75 R100 R125 R150 R175 R200	L(Internal Opening)	40	42	4.4	16	39	56.5	16	8.6	48	EXBPC -25-25C
		38				55			52				61	EXBPC -25-38C
		50				67			64				73	EXBPC -25-50C
		57				74			71				80	EXBPC -25-57C
		60				77			74				83	EXBPC -25-60C
		75				92			89				98	EXBPC -25-75C
		77				94			91				100	EXBPC -25-77C
		100				117			114				123	EXBPC -25-100C
		103				120			117				126	EXBPC -25-103C

Fixed Joint Type and Parameters (see table above)



Compatible with Divider Plates

EXBPC - NY

