

Drag Chain ▶ Reinforced Closed Drag Chain, Double-side Opening 25 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model

Code | Internal Height H1

EXBPD - 25

② Internal Width B1

38

③ Bending Radius R

R40

④ Number sections

16

Joint (Single Joint Model for Separate Purchase)

Model

EXBPD-25-38C



Discounted Price

Quantity 1~9 10~

Price 100% Separate Question

Price Excluding Tax (Yuan)




CAD 2D 3D

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXBPD	Colorful Closed	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000÷Pitch



⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram




Main Body

Joint



Suitable for Cables with a Diameter Below 22mm

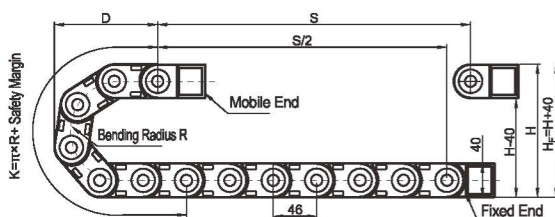


Pitch=46mm, Number of Links per Meter=22, Chain Length=S/2+K, S=Stroke Distance, K=π x R+ "Safety Margin"
Actual Installation Height: H=H+40mm(Load 1kg/m)

R	H	D	K
40	120	132	218
55	150	147	265
75	190	167	328
100	240	192	406
125	290	217	485
150	340	242	563
175	390	267	642
200	440	292	720

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters							
							Aperture	Hole Spacing					F	Joint Model
Code	Internal Height H1	A	B	C	D	E								
EXBPD	25	38	R40 R55 R75 R100 R125 R150 R175 R200	L(Internal Opening)	40	55	4.4	16	52	56	16	8.6	61	EXBPD -25-38C
		67				64			73				EXBPD -25-50C	
		74				71			80				EXBPD -25-57C	
		77				74			83				EXBPD -25-60C	
		92				89			98				EXBPD -25-75C	
		94				91			100				EXBPD -25-77C	

Fixed Joint Type and Parameters (see table above)



Compatible with Divider Plates
EXBPD - NY

