

Drag Chain ▶ Reinforced Bridge-type Drag Chain, Double-side Opening 30 Series



Please order according to the diagram

①-④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXBPE- 30

② Internal Width B1
25

③ Bending Radius R
R55


④ Number sections
16

Joint (Single Joint Model for Separate Purchase)


Model
EXBPE-30-25C




Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)

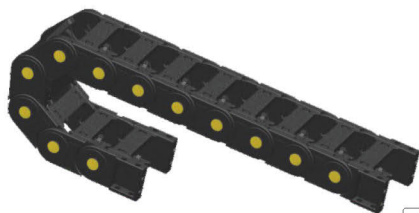

CAD 2D 3D



Suitable for Cables with a Diameter Below 27mm

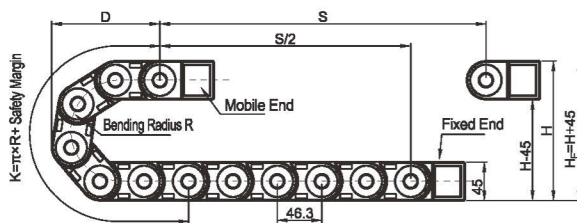


Pitch=46.3mm, Number of Links per Meter=22, Chain Length=S/2+K, S=Stroke Distance, K=π x R+"Safety Margin"
Actual Installation Height: H=H1+45mm(Load 1kg/m)

R	H	D	K
55	155	148	266
75	195	168	329
100	245	193	407
125	295	218	486
150	345	243	564
175	395	268	643
200	445	293	721

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXBPE	Colorful Bridge-type	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000÷Pitch
⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)



Schematic Diagram

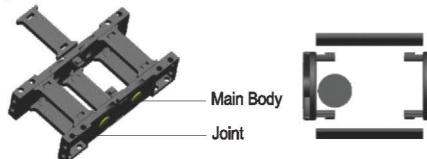

Main Body
Joint

Model		Internal Width B1	Bending Radius R	Style	External Height H1	External Width B2	Fixed Joint Type and Parameters						
Code	Internal Height H1						Aperture	Hole Spacing					F
		A	B	C	D	E							
EXBPE	30	25	R55 R75 R100 R125 R150 R175 R200	L(Internal Opening)	45	5	18.5	40.6	61.4	18.6	11	51	EXBPE-30-25C
		38						58				64	EXBPE-30-38C
		50						70				76	EXBPE-30-50C
		57						77				83	EXBPE-30-57C
		60						80				86	EXBPE-30-60C
		75						95				101	EXBPE-30-75C
		77						97				103	EXBPE-30-77C
		100						120				126	EXBPE-30-100C
		103						123				129	EXBPE-30-103C

Fixed Joint Type and Parameters (see table above)

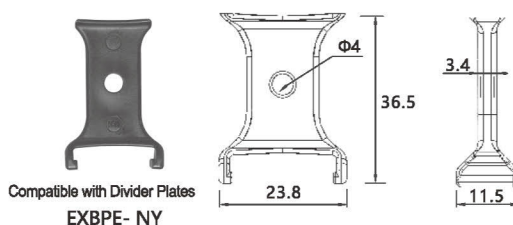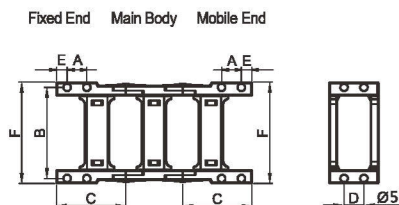

Compatible with Divider Plates
EXBPE- NY