

Drag Chain ▶ Reinforced Closed Drag Chain, Double-side Opening 30 Series



Please order according to the diagram

①~④ Select the type and parameters in the order of for ordering.

① Model
Code Internal Height H1
EXBPF - 30 — **38** — **R55** — **16**

Joint (Single Joint Model for Separate Purchase)

Model
EXBPF-30-38C



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (VAT)




CAD 2D 3D

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXBPF	Colorful Closed	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint

⚠ Number of Links per Meter=1000÷Pitch


⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram




Main Body

Joint



Suitable for Cables with a Diameter Below 27mm

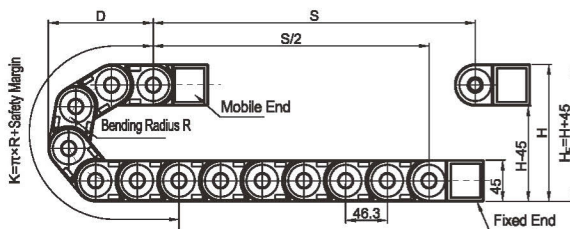


R	H	D	K
55	155	148	266
75	195	168	329
100	245	193	407
125	295	218	486
150	345	243	564
175	395	268	643
200	445	293	721

Pitch=46.3mm, Number of Links per Meter=22, Chain Length=S/Z+K, S=Stroke Distance, K=π x R+“Safety Margin”
Actual Installation Height: H=H+45mm(Load 1kg/m)

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters							
							Aperture	Hole Spacing					F	Joint Model
Code	Internal Height H1							A	B	C	D	E		
EXBPF	30	38	R55 R75 R100 R125 R150 R175 R200	L(Internal Opening)	45	58	5	18	53.6	61.4	18	11	64	EXBPF -30-38C
		50				70			65.6				76	EXBPF -30-50C
		57				77			72.6				83	EXBPF -30-57C
		60				80			75.6				86	EXBPF -30-60C
		75				95			90.6				101	EXBPF -30-75C
		77				97			92.6				103	EXBPF -30-77C

Fixed Joint Type and Parameters (see table above)

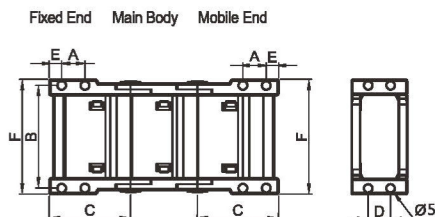

EXBPF- NY

Drag Chain 30