

Drag Chain ▶ Reinforced Closed Drag Chain, Double-side Opening 35 Series



Please order according to the diagram

①-④ Select the type and parameters in the order of for ordering.


① Model
Code Internal Height H1
EXBPH - 35 — 50 — R60 — 16
② Internal Width B1
③ Bending Radius R
④ Number sections

Joint (Single Joint Model for Separate Purchase)

Model
EXBPH-35-50C




Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yuan)

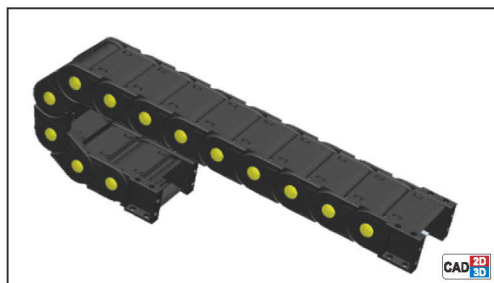

Code	Type	How to open	Material	Color	Allowable Temperature	Accessories
EXBPH	Colorful Closed	Internal Opening	PA6+GF30	Black	-20°C~120°C	Joint



- ⚠ Number of Links per Meter=1000÷Pitch
- ⚠ Drag Chain Joints Sold as a Complete Set(Mobile End+Fixed End)

Schematic Diagram




Main Body

Joint



Suitable for Cables with a Diameter Below 32mm

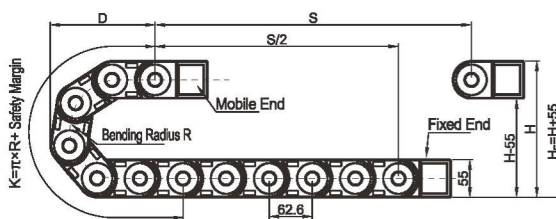


Pitch=62.6mm, Number of Links per Meter=16, Chain Length=S/2+K, S=Stroke Distance, K=π x R*“Safety Margin”
Actual Installation Height: H=H+55mm(Load 1kg/m)

R	H	D	K
60	175	186	315
75	205	201	362
100	255	226	440
125	305	251	519
150	355	276	597
175	405	301	676
200	455	326	754

Model		Internal Width B1	Bending Radius R	Style	External Height H2	External Width B2	Fixed Joint Type and Parameters									
							Aperture	Hole Spacing						F	Joint Model	
Code	Internal Height H1		A	B	C1	C2		D	E1	E2						
EXBPH	35	50	R60 R75 R100 R125 R150 R175 R200	L(Internal Opening)	55	73	6	24	66	77	79	26	16	17.5	78	EXBPH -35-50C
		60				83			88						EXBPH -35-60C	
		75				98			103						EXBPH -35-75C	
		100				123			128						EXBPH -35-100C	
		125				148			153						EXBPH -35-125C	
		130				153			158						EXBPH -35-130C	
		150				173			178						EXBPH -35-150C	

Fixed Joint Type and Parameters (see table above)

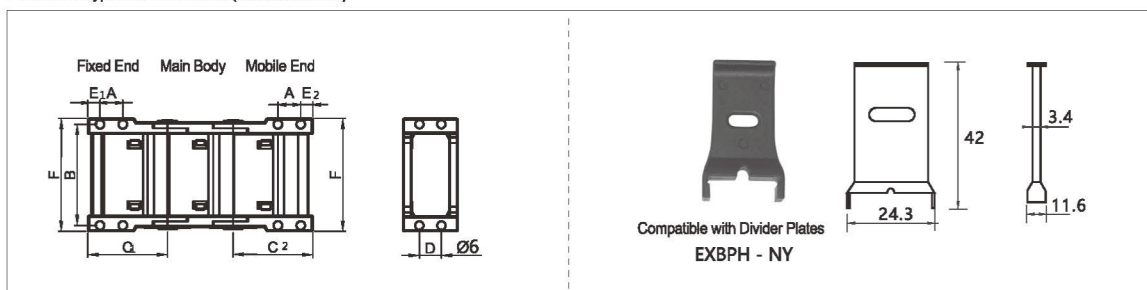

Compatible with Divider Plates
EXBPH - NY