

Plastic Universal Ball ▶ Adhesive Type / Flange Type Turned Type



Please order according to the diagram

1~2 Select the type and parameters in the order of for ordering.

Adhesive Type

Model (1 Code) — 2 Specification
JAEFS — **9**

Flange Type

Model (1 Code) — 2 Specification
JAEGT — **22**



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation


Price Excluding Tax (Yuan)

Adhesive Type



CAD 2D 3D

Code	Type	Main Body/Adjustment ring material		Main Ball		Secondary Ball	
		International	Equivalent	Material	Hardness	Material	Hardness
JAEFS	Adhesive Type Insertion Type	—	POM (Polyacetal)	POM (Polyacetal)	—	SUS440C	HRC55~

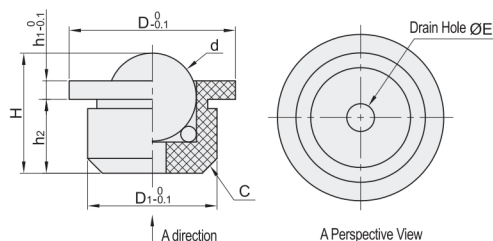

Model		D	D ₁	h ₁	h ₂	d	H	E	C	Load-bearing Capacity N(kgf)
Code	Specification									
	7	9	7		4	4.76	6.5	1.5	0.8	2(0.2)
JAEFS	9	11	9		5	5.56	7.5	2.5		4(0.4)
	13	15	13	1	8	8.73	11.8	3.5		7(0.7)
	15	17	15		8	10.32	12.5	3.5	1	11(1.1)
	20	22	20		11.5	15.87	18.2	5.3		14(1.4)
	24	26	24	1.5	15	19.05	23.1	6.4		21(2.1)


Flange Type




CAD 2D 3D

Code	Type	Material		
		Main Body	Main Ball	Secondary Ball
JAEGT	Flange Type Standard Type	Nylon	POM	SUS304

Specification: 15/25



Specification: 22/30



Model		D	D ₁	d	H	h ₁	T	Single Body Load Capacity (kg)	Allowable Load (kg)	Body Weight (g)
Code	Specification									
	15	24	31	15.875	21	10	4.5	8	15	30
JAEGT	22	36	45	25.225	31	9.8	4	12	20	60
	25	38		25.4		14	7.2	20	30	100
	30	45	55	30.163	36.5	13.8	6.4	30	40	180