

Hanging Wall Pin ▶ Internal Thread Type. Standard Type/Hexagonal Type

External Thread Mounting Type



Please order according to the diagram

①~⑦ Select the type and parameters in the order of for ordering

Model(●Code) - ●Specification - ●Dg6 - ●Y - ●F - ●E - ●N
NMDCH - **6** - **D6** - **Y65** - **F110** - **E15** - **N3**



Discounted Price
 Quantity 1~9 10~
 Price 100% Separate Quotation
 Price Excluding Tax (¥/unit)



CAD 2D/3D


Code	Type	Material		Surface Treatment
		International	Equivalent	
NMDCH NMECH	Internal Thread Type	45	S45C	Black Oxide Finish
NMDCJ NMECJ		0Cr18Ni9	SUS304	Electroless Nickel Plating
NMDCW	Fixed Thread Length Type	35CrMo	SCM435Hardness 33~38HRC	—
NMDH NMDH	Internal Thread Type	45	S45C	Black Oxide Finish
NMDJ NMDJ		0Cr18Ni9	SUS304	Electroless Nickel Plating
NMDK NMDK	Specified Thread Length Type	—	—	—

Y ≥ Width Dimension of Two Planes at Size 17


Table 1

N	Y+F
M3	Y+F ≥ 11.5
M4	Y+F ≥ 14.0
M5	Y+F ≥ 16.2
M6	Y+F ≥ 18.5
M8	Y+F ≥ 23.5
M10	Y+F ≥ 28.5
M12	Y+F ≥ 35.3
M16	Y+F ≥ 45.0
M20	Y+F ≥ 55.0


Standard Type
Fixed Thread Length Type

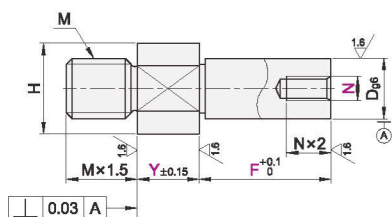


Standard Type
Specified Thread Length Type

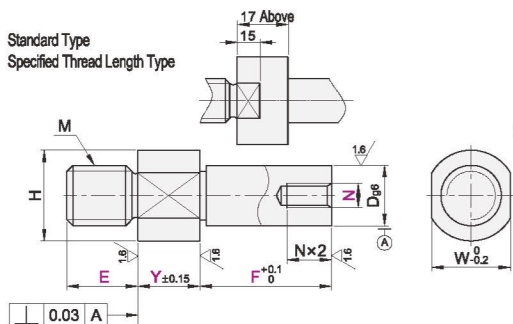

Hexagonal Type
Fixed Thread Length Type

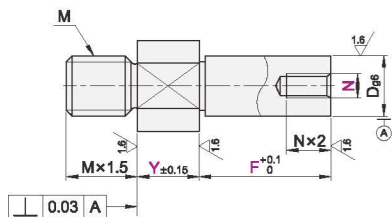

Hexagonal Type
Specified Thread Length Type

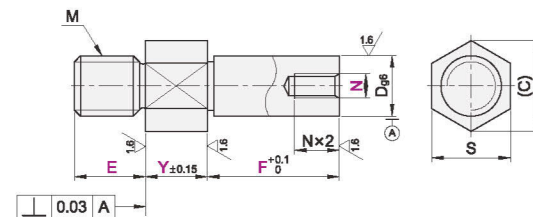

See the next page for the dimensions of the external thread tool withdrawal groove

Standard Type

Model	Code	Dg6	Y	F	E	N	H	W	M
Fixed Thread Length Type	6	6	-0.004 -0.012		6~15	3	10	8	M6
	8	8		5~110	8~20	4	12	10	M8
	10	10	-0.005 -0.014		10~22	4 5 6	15	13	M10
	12	12		2~65		5 6 8	17	14	M12
	13	13				6 8 10	18	15	M12
	15	15	-0.006 -0.017		12~25		20	17	M12
	16	16				6 8 10	21	18	M12
	17	17					22	19	M12
	18	18					23	20	M12
	20	20		5~160			26		M20
Specified Thread Length Type	20A	20				6 8 10 12	24		M16
	22	22					24		M20
	22A	22	-0.007 -0.020	4~80	20~42				M16
	25	25				8 10 12 16	31	27	M20
	25A	25							M16
	30	30				8 10 12 16 20	36	32	M20
	30A	30							M16

Hexagonal Type

Model	Code	Dg6	Y	F	E	N	S	(C)	M
Fixed Thread Length Type	6	6	-0.004 -0.012		6~15	3	8	9.2	M6
	8	8	-0.005 -0.014	5~110	8~18	4	10	11.5	M8
	10	10			10~22	4 5 6	13	15	M10
	12	12				5 6 8	14	16.2	M12
	13	13							M12
	15	15	-0.006 -0.017	2~65			17	19.6	M12
	16	16			12~25	6 8 10	19	21.9	M12
	17	17							M12
	18	18							M12
	20	20			10~110		24	27.7	M20
Specified Thread Length Type	20A	20				6 8 10 12			M16
	22	22							M20
	22A	22	-0.007 -0.020	4~65	20~42				M16
	25	25				8 10 12 16	27	31.2	M20
	25A	25							M16
	30	30				8 10 12 16 20	32	36.9	M20
	30A	30							M16

Please refer to the next page for detailed examples of optional processing and optional processing selection