

Hanging Wall Pin ▶ Grooved with Snap Ring Standard Type

Guided External Thread Mounting Type



Please order according to the diagram

①~⑧ Select the type and parameters in the order of for ordering

Model(①Code) - ②Specification - ③Dg6 - ④Y - ⑤F - ⑥G - ⑦E - ⑧YC WC ME

NPACH - 6 - D6 - Y65 - F120 - G10 - E15 - YC




Discounted Price
Quantity Price 1~9 100% 10~ Separate Quotation




Code	Type	Material		Surface Treatment
		International	Equivalent	
NPACH	Grooved with Snap Ring Standard Type	45	S45C	Black Oxide Finish
NPACJ			SUS304	Electroless Nickel Plating
NPACK			SCM435 Hardness 33~38HRC	—
NPACW		45	S45C	Black Oxide Finish
NPADH	Specified Thread Length Type	45	S45C	Electroless Nickel Plating
NPADJ			SUS304	—
NPADK				

Y ≥ Width Dimension of Two Planes at Size 17

Fixed Thread Length Type


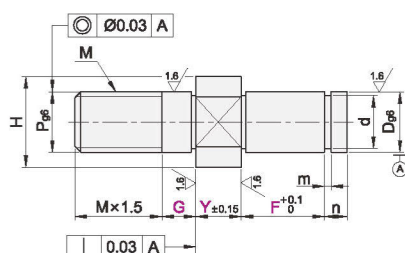


Specified Thread Length Type

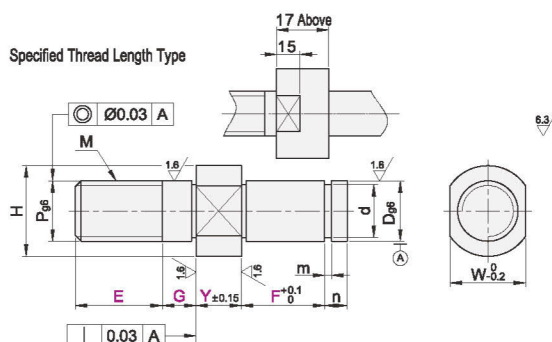

Model		D _{g6}	Minimum Unit 1				P _{g6}	M	H	W	d	m	n		
Code	Specification		Y	F	G	E									
Fixed Thread Length Type	3	3	-0.092 -0.098	2~35	3~60	3~8	3~8	3	M3	7	5	2	+0.080 0	0.5	2.5
	4	4					4~10	4	M4	8	6	3			
	5	5	-0.004 -0.012				5~12	5	M5	9	7	4	+0.075 0	0.7	
	6	6		5~120	5~10	8~18	6~15	6	M6	10	8	5			3.5
	8	8	-0.005 -0.014				8~18	8	M8	12	10	7	+0.080 0	0.9	
	10	10					10~22	10	M10	15	13	9.6	0 -0.090		
Specified Thread Length Type	12	12	-0.008 -0.017	2~65		5~15	12~27	12	M12	17	14	11.5	0 -0.110	1.15	4.5
	13	13								18	15	12.4			
	15	15								20	17	14.3			
	16	16		21	18	15.2	16.2								
	17	17		23	20	17									
	18	18						20	M20	26	24	19			
	20	20	-0.007 -0.020	10~170		5~20	20~45	16	M16						
	20A							20	M20	28	25	21	0 -0.210	1.35	5.5
	22	22						16	M16						
	22A	22		20	M20	31	27	23.9							
	25	25				16	M16								
	25A	25				20	M20	36	32	28.6	1.65				
	30	30					16	M16							
	30A	30													

Optional Processing

Code	Technical Specification	
YC	Change Y Dimension Tolerance	Selection Method YC ① Change Y Dimension Tolerance to ±0.04
		
WC	Change to a four-sided wrench slot	Selection Method WC
		
ME	With retaining ring attached	Selection Method ME ① Specification 3~8 : Type E retaining ring Specification 10~30 A : Type C retaining ring