

Hanging Wall Pin ▶ Grooved with Snap Ring, Stepped Type/Hexagonal Type

Guided External Thread Mounting Type



Please order according to the diagram

①~⑥ Select the type and parameters in the order of for ordering

■ Stepped Type

Model(①Code) - ②Specification - ③Dg6 - ④Y - ⑤F - ⑥G - YC WC ME

NPBCH

6

D6

Y35

F55

G10

YC

■ Optional Processing




Discounted Price

Quantity 1~9 10~

Price 100% Separate Quotation


Price Excluding Tax (Yen)

Stepped Type

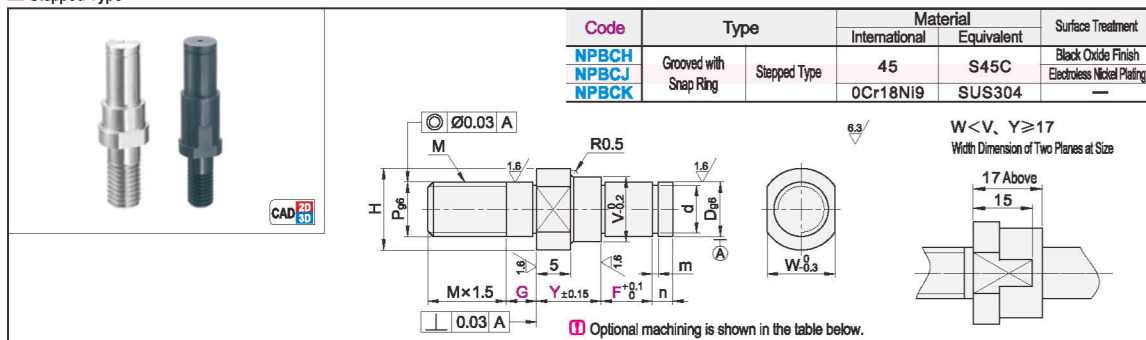

Model	①Code	②Specification	③Dg6	④Y	⑤F	⑥G	Pg6	M	V	H	W	d	m	n
NPBCH NPBCJ NPBCK	3	3	3	-0.002 -0.008			3	M3	5	7	5	2	+0.060 0	0.5
	4	4	4	-0.004 -0.012	7~35	3~55	4	M4	6	8	6	3		2.5
	5	5	5				5	M5	7	9	7	4	+0.075 0	0.7
	6	6	6				6	M6	8	10	8	5		
	8	8	8	-0.005 -0.014		5~110	8	M8	10	12	10	7	+0.090 0	0.9
	10	10	10				10	M10	13	15	13	9.6	-0.090 0	3.5
	12	12	12						15	17	14	11.5		
	13	13	13						16	18	15	12.4		
	15	15	15	-0.006 -0.017			12	M12	18	20	17	14.3		1.15
	16	16	16						19	21	18	15.2	0 -0.110	4.5
	17	17	17						20	23	20	16.2		
	18	18	18						21	23	20	17		
	20	20	20				20	M20	23	26	24	19		
	20A	20A	20A				16	M16						
	22	22	22	-0.007 -0.020		10~110	20	M20	26	28	25	21	0 -0.210	1.35
	22A	22A	22A				16	M16						
	25	25	25				16	M20	29	31	27	23.9		5.5
	25A	25A	25A				16	M16						
	30	30	30				20	M20						
	30A	30A	30A				16	M16	34	36	32	28.6		1.65

Hexagonal Type

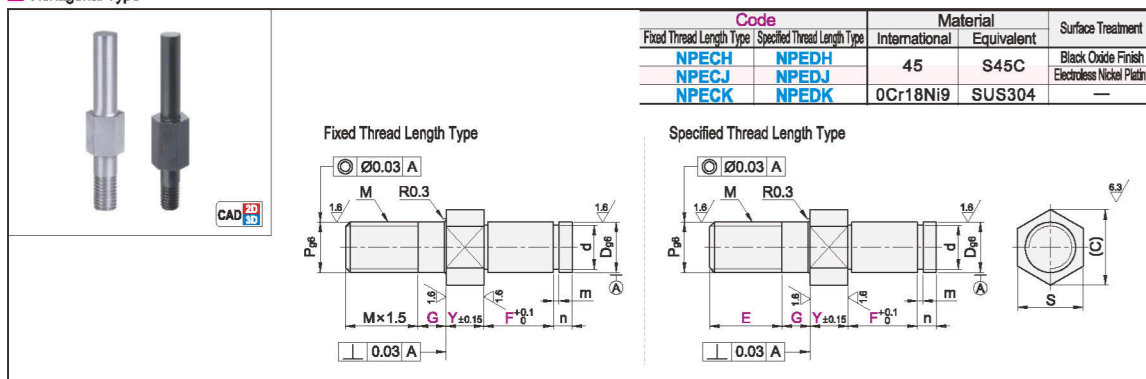

Model	①Code	②Specification	③Dg6	Minimum Unit 1				Pg6	M	S	(C)	d	m	n	Optional Processing			
				④Y	⑤F	⑥G	⑦E									Code	Technical Specification	
Fixed Thread Length Type	3	3	3	-0.008				3~8	3	M3	6	6.9	2	+0.060	0.5	YC	Change Y Dimension Tolerance Selection Method YC ① Change Y Dimension Tolerance to ±0.04	
	4	4	4	-0.004	2~32	3~55	3~8	4~10	4	M4	7	8.1	3	0	0.7			
	5	5	5	-0.012				5~12	5	M5	8	9.2	4	+0.075	0			
	6	6	6					6~15	6	M6	10	11.5	5	0	0.9			
	8	8	8	-0.005	5~110	5~10		8~18	8	M8	13	15.0	7	+0.090	0			
	NPECH	10	10	-0.014				10~22	10	M10	14	15.0	9.6	0.080	3.5			
	NPECJ	12	12								16	16.2	11.5	0				
	NPECK	13	13		2~65		5~15				17	19.6	12.4	0	1.15	WC	Change to a four-sided wrench slot Selection Method WC ① Only applicable to stepped type.	
	Specified Thread Length Type	15	15	-0.006				12~25	12	M12			14.3	0				
		16	16	-0.017							19	21.9	15.2	-0.110	4.5			
17		17										16.2						
NPEDH		18	18		10~110							17						
NPEDJ		20	20															
NPEDK	20A	20A	-0.007			5~20		20	M20	24	27.7	19	0	1.35	ME	With retaining ring attached Selection Method ME ① Specification 3~8 : Type E retaining ring Specification 10~30 A : Type C retaining ring		
	22	22	-0.020	4~65		20~42		16	M16				-0.210	5.5				
	22A	22A						20	M20			21						