

Hanging Wall Pin ▶ Internal Thread Type/Stepped Type/Hexagonal Type

Guided External Thread Mounting Type



Please order according to the diagram

①~⑦ Select the type and parameters in the order of for ordering


■ Stepped Type

Model(①Code) - ②Specification - ③Dg6 - ④Y - ⑤F - ⑥G - ⑦N - YC WC
 NPDCJH - 6 - D6 - Y32 - F110 - G10 - N4 - YC




Discounted Price
 Quantity 1~9 10~
 Price 100% Separate Quotation
 Price Excluding Tax (Yen)

■ Stepped Type

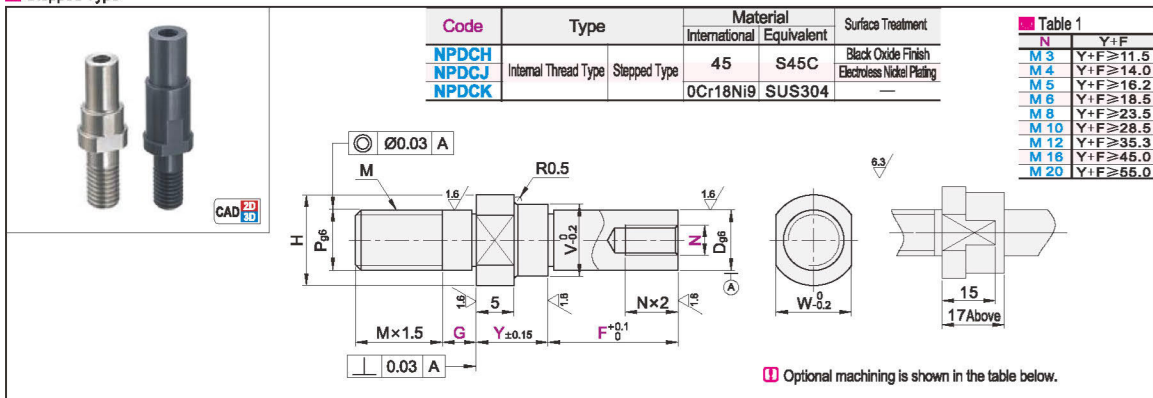

Model		Dg6		Minimum Unit 1			N		Pg6	M	V	H	W
① Code	② Specification	③	④	⑤ Y	⑥ F	⑦ G	⑧	⑨					
NPDCJH NPDCJ NPDCJK	6	6	-0.004 -0.012	7~65	5~110	5~10	3	6	M6	8	10	8	
	8	8	-0.008 -0.014				4	8	M8	10	12	10	
	10	10	4 5 6				10	M10	13	15	13		
	12	12	5 6 8			12	M12	15	17	14			
	13	13						16	18	15			
	15	15						18	20	17			
	16	16	-0.006 -0.017					19	21	18			
	17	17	20					23	20				
	18	18	21										
	20	20	10~110		5~20	20	M20	24	26	24			
	20A					16	M16						
	22	22				20	M20	26	28	25			
	22A					16	M16						
	25	25				20	M20	29	31	27			
	25A					16	M16						
	30	30				20	M20	34	36	32			
	30A		-0.007 -0.020				16	M16					

■ Hexagonal Type

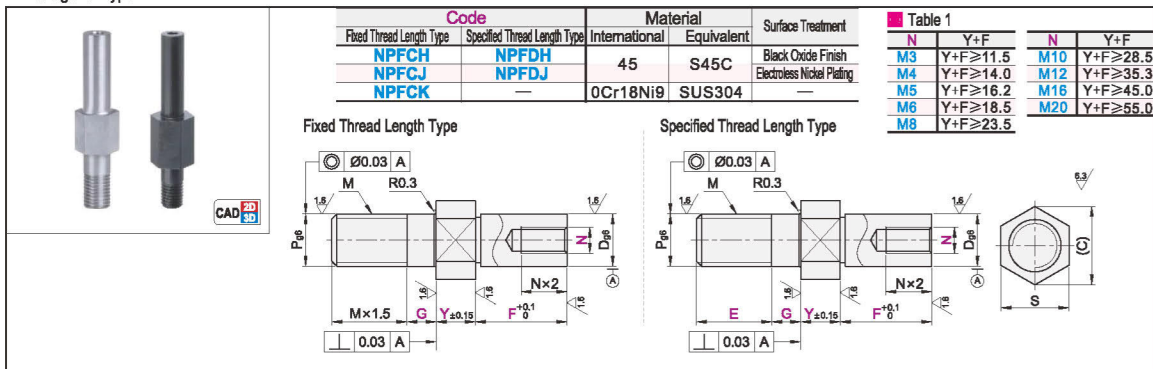

Model	①Code	②Specification	③Dg6	④Y	⑤F	⑥G	⑦E	⑦N	Pg	M	S (C)
Fixed Thread Length Type	6	6	6	5~110	5~10	6~15	3	6	M6	8	9.2
	8	8	8			8~18	4	8	M8	10	11.5
	10	10	10			10~22	4 5 6	10	M10	13	15
	12	12	12					14	M12	16.2	
	13	13	13					17		19.6	
	15	15	15					19		21.9	
Specified Thread Length Type	16	16	16								
	17	17	17								
	18	18	18								
	20	20	20								
	22A	22	22								
	22A	22	22								
Fixed Thread Length Type	25	25	25								
	NPFCJH	NPFCJH	NPFCJH								
	NPFCJ	NPFCJ	NPFCJ								
	NPFCJ	NPFCJ	NPFCJ								
	30	30	30								
	30A	30	30								

■ Optional Processing

Code	Technical Specification
YC	Change Y Dimension Tolerance
	Selection Method YC
WC	Change to a four-sided wrench slot
	Selection Method WC