

Hanging Wall Pin ▶ Internal Thread Type/Stepped Type/Hexagonal Type

Guided External Thread Mounting Type



Please order according to the diagram

①~⑦ Select the type and parameters in the order of for ordering

■ Stepped Type


Model(①Code) - ②Specification - ③Dg6 - ④Y - ⑤F - ⑥G - ⑦N - YC WC

NPDCJH - 6 - D6 - Y32 - F110 - G10 - N4 - YC




Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)

■ Stepped Type

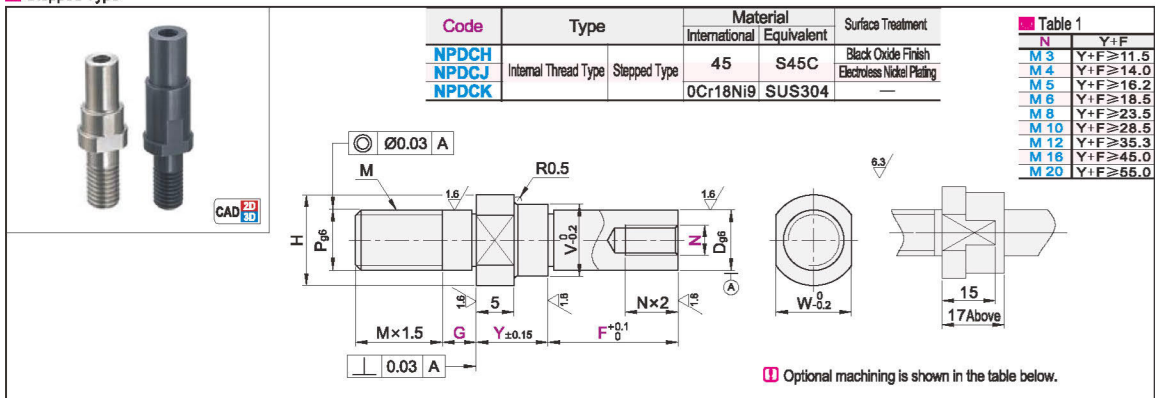

Model	①Code	②Specification	③Dg6	④Y	⑤F	⑥G	⑦N	Pg	M	V	H	W
NPDCJH NPDCJ NPDCJ	6	6	6	5~110	5~10	3	6	M6	8	10	8	8
	8	8	8			4	8	M8	10	12	10	10
	10	10	10			4 5 6	10	M10	13	15	13	13
	12	12	12			5 6 8			15	17	14	14
	13	13	13						16	18	15	15
	15	15	15						18	20	17	17
	16	16	16						19	21	18	18
	17	17	17						20			
	18	18	18						21	23	20	20
	20	20	20									
	22A	22	22						24	26	24	24
	22A	22	22						26	28	25	25
	25A	25	25						29	31	27	27
	30	30	30						34	36	32	32
	30A	30	30									

■ Hexagonal Type

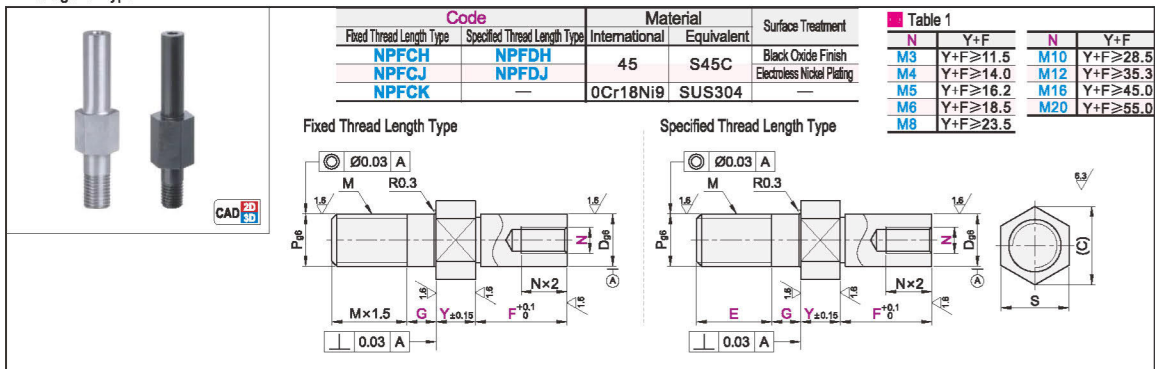

Model	①Code	②Specification	③Dg6	④Y	⑤F	⑥G	⑦E	⑦N	Pg	M	S (C)
Fixed Thread Length Type	6	6	6	5~110	5~10	6~15	3	6	M6	8	9.2
	8	8	8			8~18	4	8	M8	10	11.5
	10	10	10			10~22	4 5 6	10	M10	13	15
	12	12	12					14	M12	16.2	16.2
	13	13	13					17		19.6	19.6
	15	15	15					19		21.9	21.9
Specified Thread Length Type	16	16	16								
	17	17	17								
	18	18	18								
	20	20	20								
	22A	22	22								
	22A	22	22								
Fixed Thread Length Type	25	25	25								
	NPFCJH	NPFCJH	NPFCJH								
	NPFCJ	NPFCJ	NPFCJ								
	NPFCJ	NPFCJ	NPFCJ								
	30	30	30								
	30A	30A	30A								

■ Optional Processing

Code	Technical Specification
YC	Change Y Dimension Tolerance Selection Method YC Change Y Dimension Tolerance to ±0.04
WC	Change to a four-sided wrench slot Selection Method WC Only applicable to stepped type.