

Flat Key ▶ Threaded Counterbore Type / Threaded Removal Type



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

Threaded Counterbore Type

Model(●Code) — ●Bh9 — ●L
UWEAC — B8 — L40

Threaded Removal Type

Model(●Code) — ●Bh9 — ●L
UWFAC — B5 — L20



Discounted Price
Quantity 1~9 10~
Price 100% Separate Quotation
Price Excluding Tax (Yen)




CAD 3D


Code	Type	Material		Tensile Strength	※1 Dimension Tolerance	
		National Standard	Equivalent		L	Tolerance
UWEAC	Threaded Counterbore Type	45	S45C	600N/mm ² Above	Shortest ~ 50	-0.02
UWEAU		0Cr18Ni9	SUS304		51 ~ 80	-0.04
UWEBC		45	S45C		81 ~ 110	-0.07
UWEBU		0Cr18Ni9	SUS304			
UWECC	Threaded Removal Type	45	S45C		Shortest ~ 18	-0.03
UWECU		0Cr18Ni9	SUS304		19 ~ 30	-0.02
UWFAC		45	S45C		31 ~ 50	-0.02
UWFAE		0Cr18Ni9	SUS304		51 ~ 80	-0.04
UWFBC		45	S45C		81 ~ 110	-0.07
UWFBE		0Cr18Ni9	SUS304			
UWFCC		45	S45C			
UWFCE		0Cr18Ni9	SUS304			

Threaded Counterbore Type


A Type



B Type




C Type

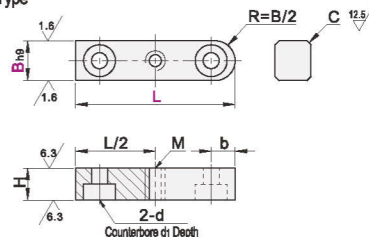


Threaded Removal Type


A Type



B Type



C Type

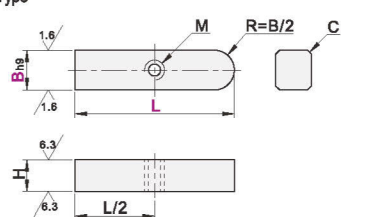

Threaded Counterbore Type

Model		L※1												H	d	d ₁	h	b	M	C	
Code	B _{h9}																				
A Type	8	0 -0.036	35	40	45	50	55	60	65	70	80	85	90	100	7	3.3	6	3.3	8	M3	0.3
UWEAC	10		45	50	55	60	65	70	80	85	90	100	8	4.3	7.5	4.3	10	M4			
B Type	12	0 -0.043	50	55	60	65	70	80	85	90	100				0 -0.090	5.3	9	5.3	12	M5	0.5
UWEBC	14		50	55	60	65	70	80	85	90	100	9							14		
UWEBU	15		50	55	60	65	70	80	85	90	100								15		
C Type	16		60	65	70	80	85	90	100	10				16							
UWECC	18		60	65	70	80	85	90	100	110	11	0 0.110	6.3	11	6.3	18	M6				
UWECU																					

Threaded Removal Type

Model		L※2										H	M	C
Code	Bh9													
A Type	5	0	10	15	20	25	30	35	40	45	50	55	60	
UWFAC	6	-0.030	10	15	20	25	30	35	40	45	50	55	60	70
UWFAE	7		15	20	25	30	35	40	45	50	55	60	70	80
B Type	8	-0.036	15	20	25	30	35	40	45	50	55	60	65	70
UWFBC	10		15	20	25	30	35	40	45	50	55	60	65	70
UWFBE	12		20	25	30	35	40	45	50	55	60	65	70	80
	14		30	35	40	45	50	55	60	65	70	80	85	90
C Type	15	-0.043	30	35	40	45	50	55	60	65	70	80	85	90
UWFCC	16		40	45	50	55	60	65	70	80	85	90	100	
UWFCE	18		40	45	50	55	60	65	70	80	85	90	100	110