

Straight Rod Type Positive Tolerance Dowel Pin

One End Internal Thread Type • Standard Type • p6
One End Internal Thread Type • With Vent Slot • Positive Tolerance/m6/p6
One End Internal Thread Type • Economic Type • Positive Tolerance



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

With Vent Slot . Tolerance m6

Model(①Code)

UXBJG

②D

D6

③L

L15



Discounted Price

Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (¥/mm)




CAD 2D


Code	Type	Tolerance	Material		Hardness
			National Standard	Equivalent	
UXBGG	One End Internal Thread Type	p6	GCr15	SUJ2	56HRC~
UXBGU			0Cr18Ni9	SUS304	—
UXBGF			9Cr18Mo	SUS440C	45~50HRC
UXBHG			GCr15	SUJ2	50~55HRC
UXBHU		m6	0Cr18Ni9	SUS304	—
UXBHF			9Cr18Mo	SUS440C	56HRC~
UXBJG			GCr15	SUJ2	50~55HRC
UXBJU			0Cr18Ni9	SUS304	—
UXBKG		p6	GCr15	SUJ2	50~55HRC
UXBKU			0Cr18Ni9	SUS304	—
UXBLC	Economic Type	+0.010 +0.005	45	S45C	35~45HRC

① When the sizes of D5 and D6 are 10, the threaded bottom hole may be costly to produce. ② Only D=6, L=10 When V=6


Standard Type . Tolerance

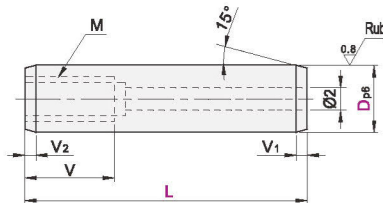


With Vent Slot . Tolerance +0.010
+0.005

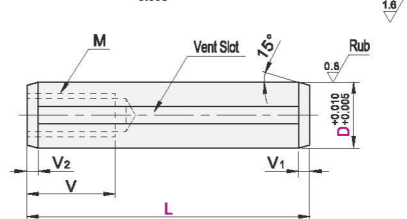

With Vent Slot . Tolerance m6

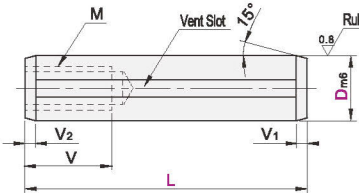

With Vent Slot . Tolerance p6

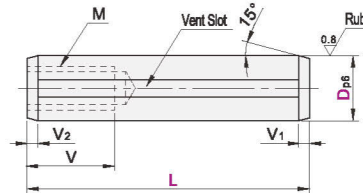

Standard Type . Tolerance

Model	D	p6	L	M	V	V1	V2
Code	D	p6	L	M	V	V1	V2
UXBGG UXBGU UXBGF	6	+0.020 +0.012	10 15 20 25 30 35	4	*8	2.0	0.5
	8	+0.024 +0.015	10 15 20 25 30 35 40	5	8	2.0	1.0
	10		15 20 25 30 35 40 45	6	10	2.5	1.0
	12	+0.029 +0.018	15 20 25 30 35 40 45 50	6	10	2.5	1.0

With Vent Slot . Tolerance +0.010
+0.005

Model	D	D Tolerance	L	M	V	V1	V2
Code	D	D Tolerance	L	M	V	V1	V2
UXBHU	5		10 15 20 25 30 35 40	3	6	2.0	0.5
	6	+0.010 +0.005	10 15 20 25 30 35 40 45 50	4	*8	2.5	0.5
	8		15 20 25 30 35 40 45 50 60 70 80	5	8	2.5	0.5

With Vent Slot/Economic Type . Tolerance +0.010
+0.005

Model	D	D Tolerance	L	M	V	V1	V2
Code	D	D Tolerance	L	M	V	V1	V2
UXBHG UXBLC	5		10 15 20 25 30 35 40	3	6	2.0	0.5
	6		10 15 20 25 30 35 40 50 60 70	4	*8	2.5	0.5
	8		15 20 25 30 35 40 45 50 60 70 80	5	8	2.5	1.0
	10	+0.010 +0.005	15 20 25 30 35 40 45 50 60 70 80	6	10	3.0	1.0
	12		20 25 30 35 40 45 50 60 70 80	6	10	3.0	1.0
	13		25 30 35 40 45 50 60 70 80	8	15	3.0	1.0
	16		25 30 35 40 45 50 60 70 80	8	15	3.5	1.5

With Vent Slot . Tolerance +0.010
+0.005

Model	D	D Tolerance	L	M	V	V1	V2
Code	D	D Tolerance	L	M	V	V1	V2
UXBHF	5		10 15 20	3	6	1.5	0.5
	6		15 20 25 30	4	8		
	8		15 20 25 30 35 40	5		2	
	10	+0.010 +0.005	20 25 30 35 40 45 50 60	6	10		1
	12		30 40 50 60	6		2.5	
13			30 40 50 60	8	15		

With Vent Slot . Tolerance m6/p6

Model	D	m6	p6	L	M	V	V1	V2
Code	D	m6	p6	L	M	V	V1	V2
UXBJG UXBJU UXBKG UXBKU	5	+0.012	+0.020	10 15 20 25 30 35 40 45	3	6	2.0	0.5
	6	+0.012	+0.012	10 15 20 25 30 35 40 45 50	4	*8	2.5	0.5
	8	+0.015	+0.024	10 15 20 25 30 35 40 45 50 60 70 80	5	8	2.5	1.0
	10	+0.015	+0.024	15 20 25 30 35 40 45 50 60 70 80	6	10	3.0	1.0
	12	+0.018	+0.029	20 25 30 35 40 45 50 60 70 80	6	10	3.0	1.5
	13	+0.007	+0.018	25 30 35 40 45 50 60 70 80	8	15	3.0	1.5
	16			35 40 45 50 60 70 80	8	15	3.5	2.0
	20	+0.021	+0.035	45 50 60 70 80	10	18	3.5	2.0
		+0.008	+0.022					1.5