

Elastic Cylindrical Pin / Lock Pin



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

Model(①Code) — ②D — ③L

UXHAC — D1 — L5



Discounted Price


Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yen)

Elastic Cylindrical Pin, Straight Rod Type



CAD 2D 3D

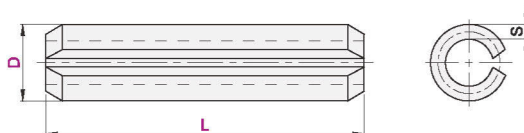

Code	Type	Material	Hardness	Surface Treatment
UXHAC	Straight Rod Type	Spring Steel	45~50HRC	Black Oxide Finish

Code	Model			L	S
	Specification	D max	min		
UXHAC	1	1.2	1.1	5 10	0.2
	1.2	1.4	1.3	5 10	0.25
	1.4	1.6	1.5	5 10	0.28
	1.6	1.8	1.7	5 10	0.3
	2	2.25	2.15	5 10 16 20	0.4
	2.5	2.75	2.65	10 16 20	0.5
	3	3.25	3.15	10 16 20 25 30	0.6
	4	4.4	4.2	10 16 20 25 30 35 40	0.8
	5	5.4	5.2	10 16 20 25 30 35 40 45 50	1
	6	6.4	6.2	10 16 20 25 30 35 40 45 50 55 60	1.2
8	8.6	8.3	16 20 25 30 35 40 45 50 55 60 70 75 80	1.6	
10	10.6	10.3	16 20 25 30 40 45 50 60 70 75 80 90 100	2	



Please order according to the diagram

①~③ Select the type and parameters in the order of for ordering

Model(①Code) — ②Applicable shaft diameter

UXKAC — 4



Discounted Price


Quantity 1~9 10~
Price 100% Separate Quotation

Price Excluding Tax (Yen)

Lock Pin



CAD 2D 3D

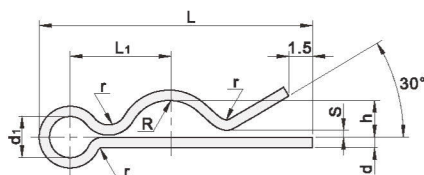

Code	Type	Material	Hardness	Surface Treatment
UXKAC	Lock Pin	Spring Steel	40~50HRC	Zinc-plated Passivation
UXKAU		SUS304	—	—

Model		d	L	d1	L1	R	h	r	S (max)
Code	Applicable shaft diameter								
(Spring Steel) UXKAC	4	1	16.3	3	6	2	1	1.5	0.5
	5		17.9		6.5	2.5	1.5		
	6	1.2	21.2	3.6	7.8	3	1.8	1.8	0.6
	7*		22.8		8.3	3.5	2.3		
(SUS304) UXKAU	8	1.6	27.7	4.8	10.4	4	2.4	2.4	0.8
	9*		29.3		10.9	4.5	2.9		
	10	1.8	32.6	5.4	12.2	5	3.2	2.7	0.9
	12		35.8		13.2	6	4.2		
	14		40.6		15	7	5		
	16		43.8		16	8	6		

① UXKAC No specifications with an asterisk (*)